

TREE 4TX Metal - Unmanaged Switch - 4 Ports

4 port unmanaged switch
(UL-Listed)


Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration



Product may differ from Image

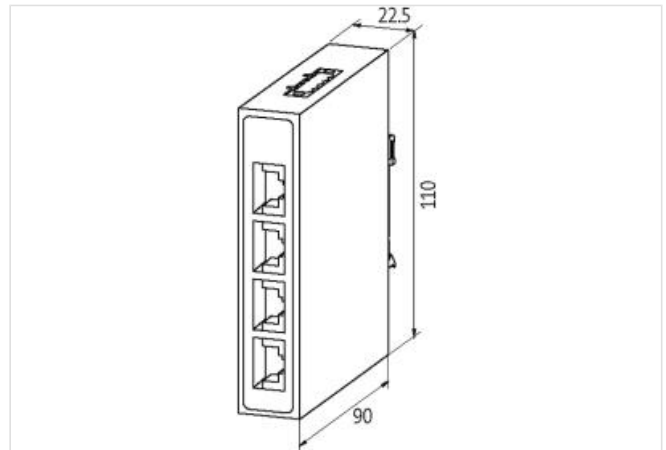

Technical Data

Operating voltage	2× 9...48 V DC, redundancy
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-10...+70 °C (storage temperature -40...+85 °C)
Housing	Metal black
Protection	IP50
Dimensions H×W×D	110×22.5×89.6 mm

Connections

Fieldbus	4× RJ45
Supply	Spring clamp plug-in terminal: 0.2...2.5 mm²

Switch Management

Protocols	no
Port Mirroring	no
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	no
Webserver	no
Switch Form	Unmanaged Switch

Product article number of manufacturer	58151
--	-------

Diagnostic

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Communication status	via LED
Monitoring - no voltage	yes