

RMI 11/230V AC OUTPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 8 A


1 relay; 1 NO/NC contact
8 A
230 V AC/DC
Screw terminals

[Link to Product](#)

Illustration



Product may differ from Image

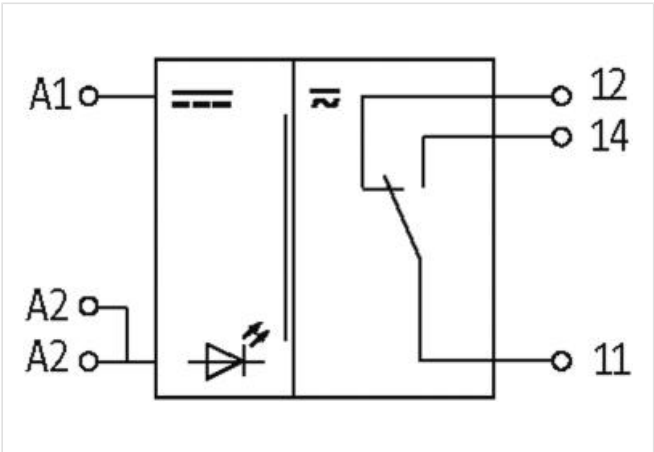

General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	6.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent
Output	
Min. load current	1 mA
Contact material	Ag Ni
Energize/release/contact bounce time	10/15/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 0.1 Hz (with load)
Power rating (voltage dependent)	max. 2000 VA/240 W
Switching current per output	max. 8 A
Input	
Connection voltage - current	230 V AC/DC (195...253 V AC/DC) - 5 mA
LED display	LED (red)
Utilization category	
AC-15	3 A (24/110/230 V AC)
AC-1	8 A (24/110/230 V AC)
DC-13	2.5 A (24 V DC); 0.4 A (110 V DC); 0.3 A (230 V DC)
Product article number of manufacturer	51603