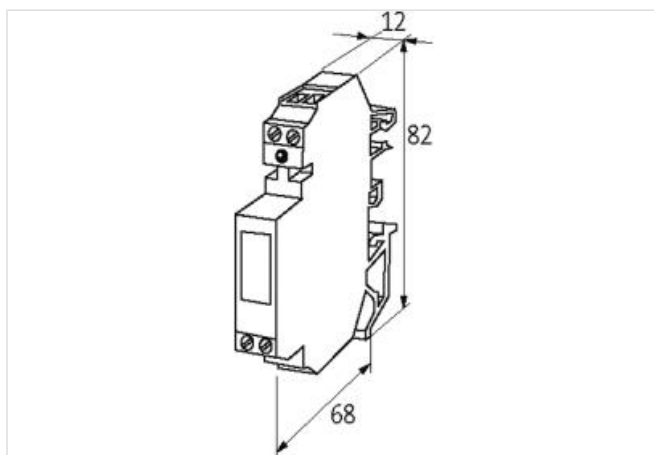
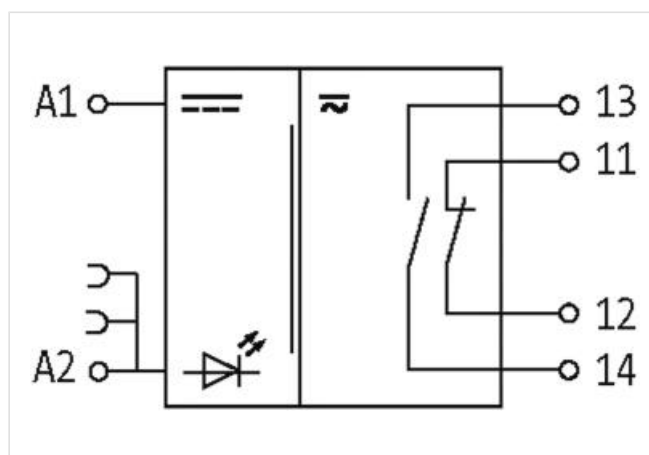


**RMMD 1S+1V24VDC INPUT RELAY**

IN: 24 VDC - OUT: 250 VAC/DC / 3 A

1 relay; 1 NO contact/1 NC contact  
 3 A  
 24 V DC  
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent
Dimensions HxWxD	82x12x68 mm

**Output**

Min. load current	1 mA
Contact material	Ag Ni 0.15 hv
Energize/release/contact bounce time	6/3/2 ms
Switching voltage	max. 250 V AC/DC

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Switching frequency	max. 10 Hz
Power rating (voltage dependent)	max. 500 VA/180 W
Switching current per output	max. 3 A
<b>Input</b>	
Plug link (supplied)	Art-No. 90960
Connection voltage - current	24 V DC (17.5...30 V DC) - 14 mA
LED display	LED (red)
<b>Utilization category</b>	
AC-15	1 A (24 V AC); 0.1 A (230 V AC)
AC-1	3 A (24 V AC); 2 A (230 V AC)
DC-13	0.8 A (24 V DC); 0.01 A (230 V DC)
Product article number of manufacturer	516014