

Xenterra 5TX unmanaged Switch wallmounted 5 Port 100Mbit

5 port unmanaged switch

Key-hole mounting/screwable


Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

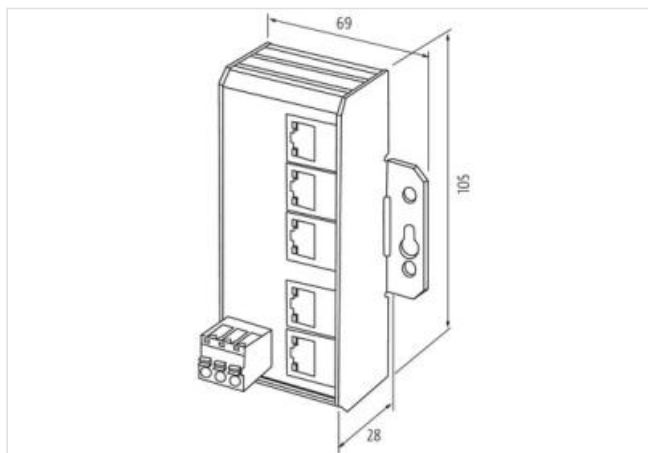

Technical Data

Operating voltage	8...28 V AC/9...36 V DC
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	Key-hole mounting/screwable
Temperature range	-40...+70 °C (storage temperature -40...+85 °C)
Housing	Metal black
Protection	IP20
Dimensions HxWxD	105x69x28 mm

Connections

Fieldbus	5x RJ45
Supply	Push-In spring clamp terminals, 0.2...2.5 mm ² (0.25...1.5 mm ²)

Switch Management

Protocols	no
Port Mirroring	no
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	no
Webserver	no
Switch Form	Unmanaged Switch

Product article number of manufacturer	58901
--	-------

Diagnostic

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Communication status	via LED
Monitoring - no voltage	yes