



MIRO 6.2 PLUGGABLE COMPL.MODULE INPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/30VDC / 6 A

- 1 NO/NC contact
- 6 A
- 24 V AC/DC
- Spring clamp terminals

[Link to Product](#)

Illustration

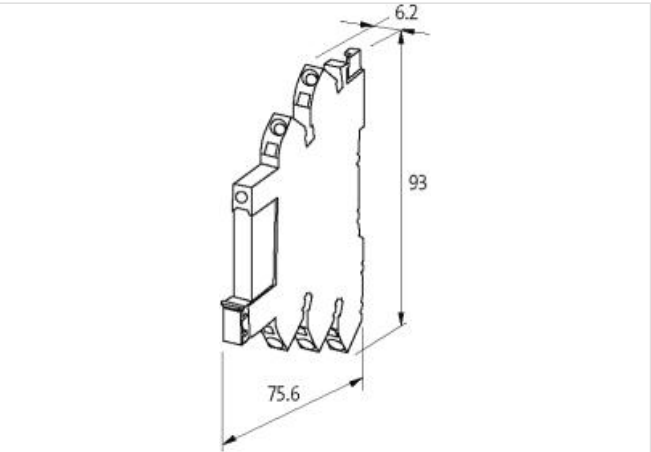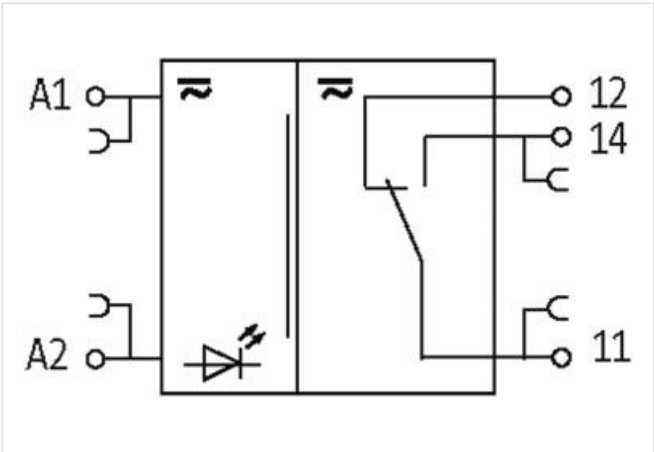

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	250 V
Mech./ elect. life	10 000 000 switching cycles (NO) 30 000; (NC) 10 000, load dependent
Protection	IP20
Dimensions HxWxD	93x6.2x75.6 mm

Output	
Min. load current	10 mA
Contact material	Ag Sn O2, gold plated
Energize/release/contact bounce time	8/4/- ms
Switching voltage	max. 250 V AC/30 V DC
Switching frequency	max. 10 Hz
Power rating (voltage dependent)	max. 1500 VA/180 W
Switching current per output	max. 6 A
Input	
Connection voltage - current	24 V AC/DC (19.2...26.8 V AC/DC) - 14 mA
LED display	LED (green)
Utilization category	
AC-15	3 A (24/110 V AC); 1.5 A (230 V AC)
AC-12	6 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
Product article number of manufacturer	3000-16013-3100040