



INTELLIGENT INTERFACE RELAY MODULE

RMI 11/24-230 VAC/DC, 1 C/0

1 relay; 1 NO/NC contact
8 A
24...230 V AC/DC
Screw terminals

[Link to Product](#)

Illustration

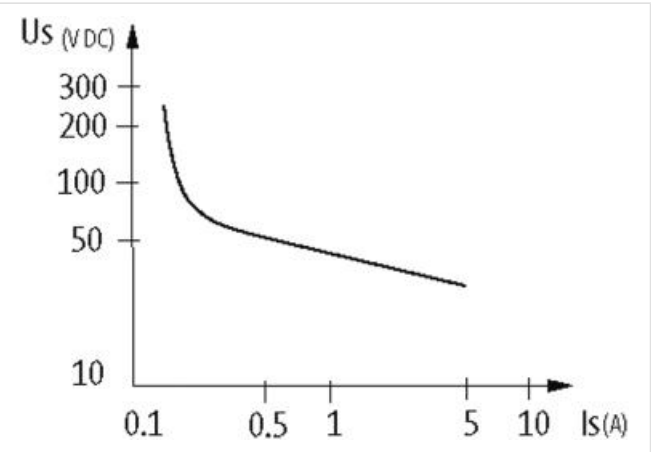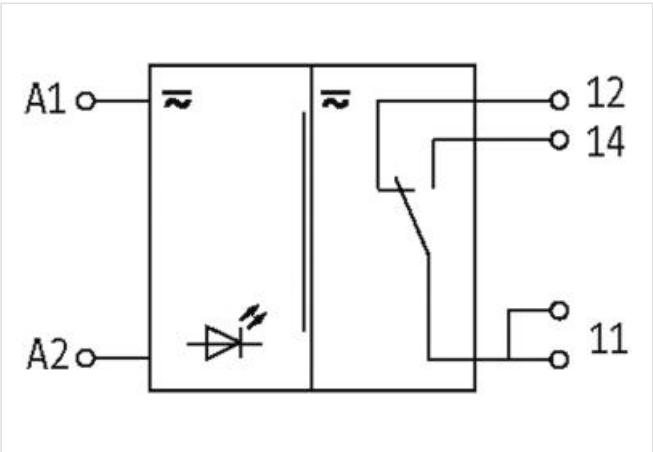

Product may differ from Image

General data	
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+50 °C (storage temperature -40...+80 °C)
Test isolation voltage	6.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent
Output	
Min. load current	100 mA
Contact material	Ag Ni
Energize/release/contact bounce time	8/20/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 0.1 Hz (with load)

Power rating (voltage dependent)	max. 2000 VA/240 W
----------------------------------	--------------------

Switching current per output	max. 8 A
------------------------------	----------

Input

Connection voltage - current	24...230 V AC/DC (21.6...253 V AC/DC) - 7 mA; max. 30 mA
------------------------------	----------------------------------------------------------

LED display	LED (red)
-------------	-----------

Utilization category

AC-15	3 A (24/110/230 V AC)
-------	-----------------------

AC-1	8 A (24/110/230 V AC)
------	-----------------------

DC-13	1.1 A (24 V DC); 0.15 A (110 V DC)
-------	------------------------------------

Product article number of manufacturer	51160
----------------------------------------	-------