



AMMDS 10-44/1 OPTO-COUPLER MODULE

IN: 35 VDC - OUT: 35 VDC / 0.2 A

Transistor 0.2 A
24 V DC
with minus plug link
Double terminals on the output side
for rapid switching

[Link to Product](#)

Illustration

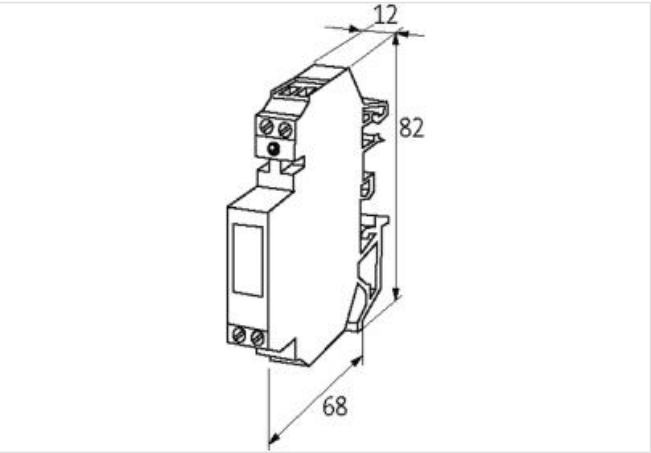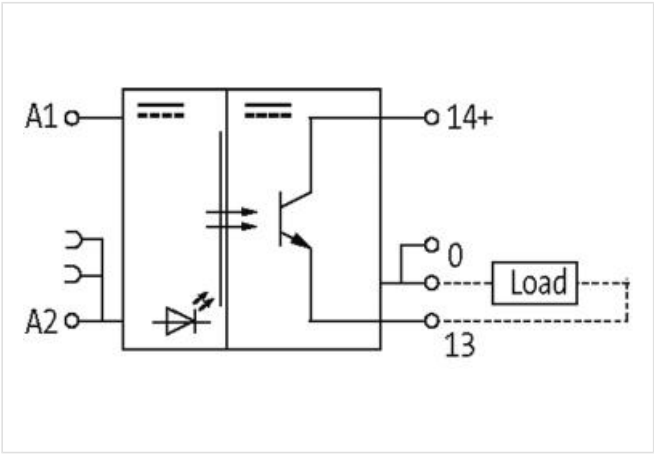

Product may differ from Image

General data	
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	68x82x12 mm
Output	
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	20/14 µs
Saturation voltage (across output)	max. 0.5 V DC

Switching voltage	5...35 V DC
Switching frequency	max. 20 kHz/200 Hz (resist./ind.)
Switching current per output	1 mA...0.2 A
Input	
Plug link (supplied)	Art-No. 90960
Voltage range OFF	0...5 V DC
Voltage range ON	10...35 V DC
LED display	LED (red)
Input current	10 mA
Product article number of manufacturer	50082