

MOTOR SUPPRESSOR

RC, 3x500VAC/4kW



3× 500 V AC +10%

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

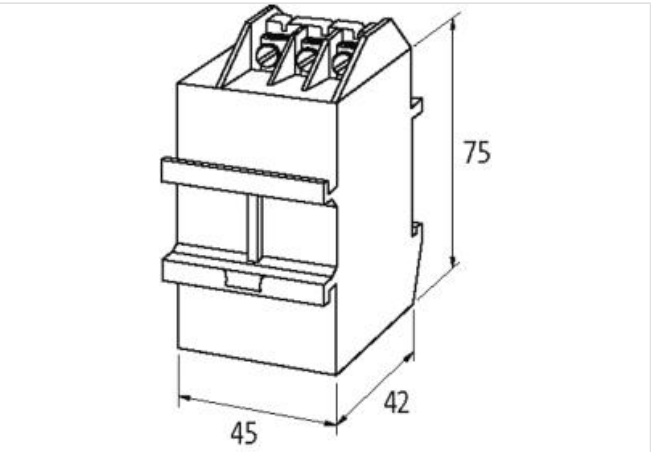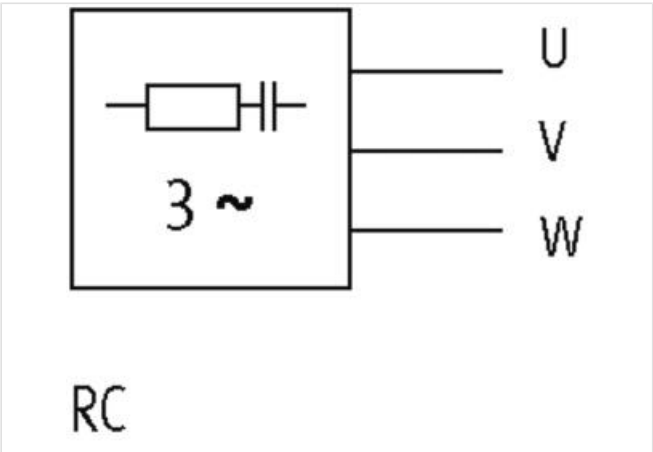

Product may differ from Image

Technical Data	
Frequency	50...60 Hz
Input voltage	500...500 V AC
Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
General data	
Temperature range	-20...+60 °C
Connection	3-pole terminal, 2× 0.75...2.5 mm², M4
Dimensions H×W×D	75×45×42 mm
Product article number of manufacturer	23001