



MIRO TR 24VDC 20KHZ IN<1MA FK OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 0.2 A

Transistor 0.2 A
24 V DC
Control current 0.1 mA (5 V DC)
Spring clamp terminals

[Link to Product](#)

Illustration

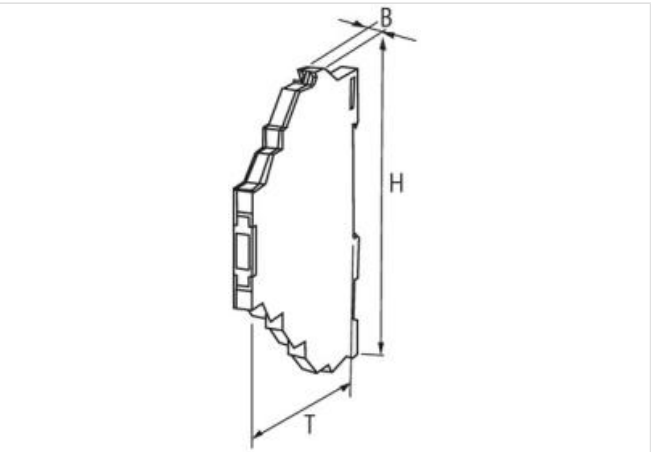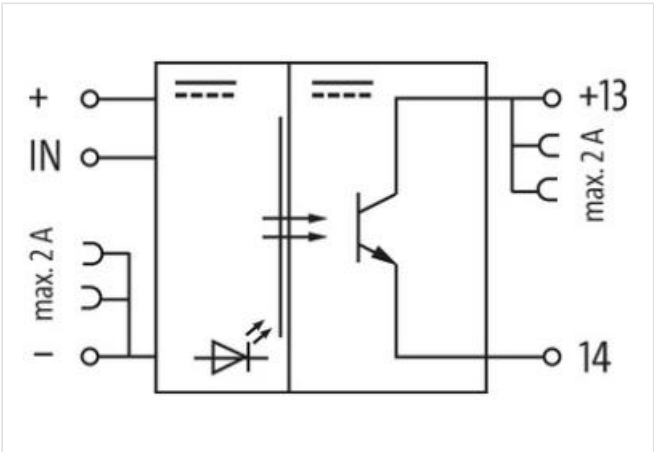

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x70 mm
Output	

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	10/18 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 20 kHz
Switching current per output	0.1 mA...0.2 A

Input

Control current	0.1 mA (5 V DC)
Voltage range OFF	0...2 V DC
Voltage range ON	15...30 V DC
LED display	LED (yellow)

Product article number of manufacturer	6652511
--	---------