



MIRO TR 24VDC FK 5P OPTO-COUPLER MODULE

IN: 48 VDC - OUT: 35 VDC / 2 A

Transistor 2 A
24 V DC
Short-circuit protected
Switching frequency: max. 1 kHz
Spring clamp terminals

[Link to Product](#)

Illustration

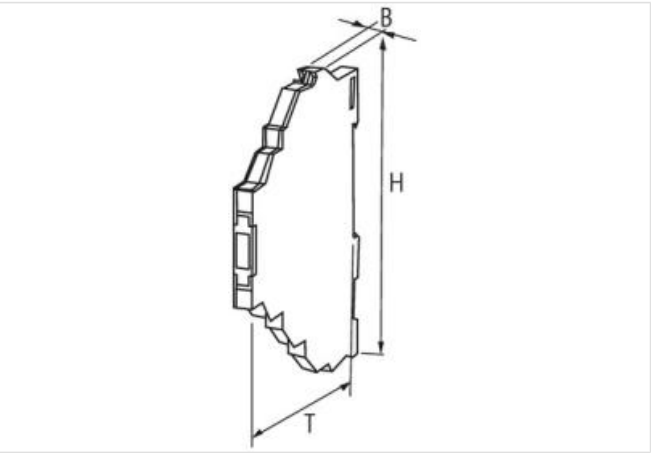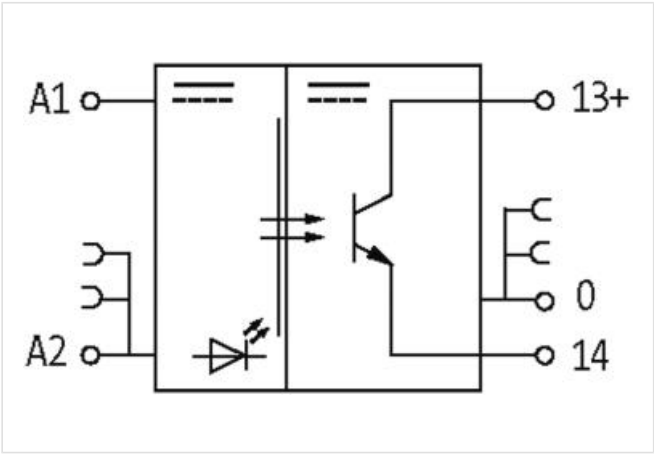

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	91×6.2×70 mm

Output	
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	90/120 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	10...35 V DC
Switching frequency	max. 1 kHz
Switching current per output	1 mA...2 A (short-circuit protected)
Input	
Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...48 V DC
LED display	LED (yellow)
Product article number of manufacturer	6652503