

**MIRO 6.2 OPTO-COUPLER MODULE**

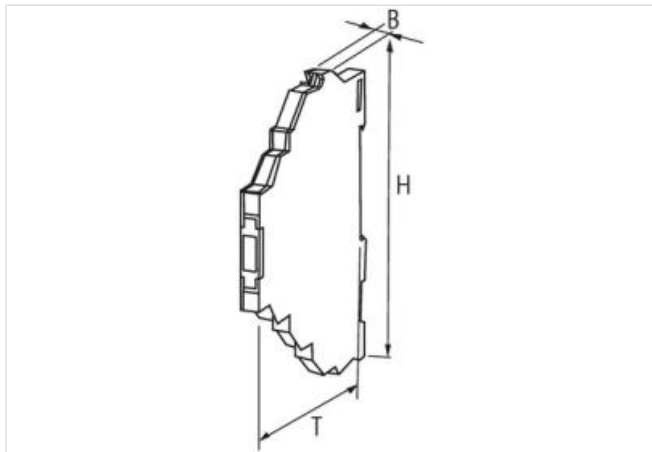
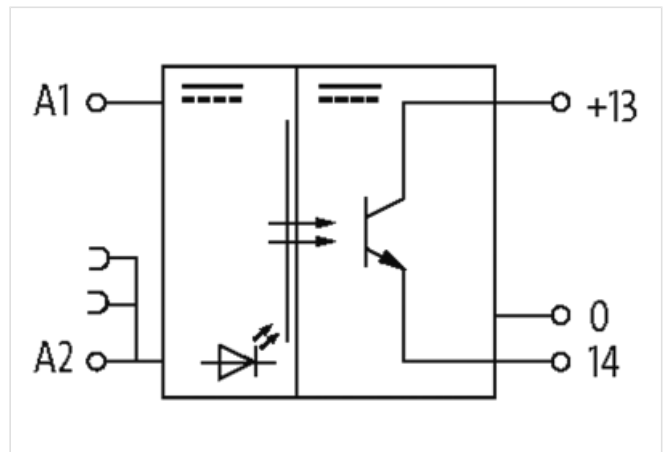
IN: 35 VDC - OUT: 30 VDC / 0.2 A max. 20 kHz

Transistor 0.2 A

24 V DC

Switching frequency: max. 20 kHz

Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x70 mm

**Output**

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Leakage current (output is open)	max. 25 $\mu$ A
Switching time ON/OFF	5/7 $\mu$ s
Saturation voltage (across output)	max. 0.3 V AC/DC
Switching voltage	10...30 V DC
Switching frequency	max. 20 kHz/200 Hz (resist./ind.)
Switching current per output	1 mA...0.2 A
<b>Input</b>	
Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...35 V DC
LED display	LED (green)
Product article number of manufacturer	526071