



**AMMDS 20-47/2 OPTO-COUPLER MODULE**

IN: 35 VDC - OUT: 280 VAC / 2A

Triac 2 A  
24 V DC  
with minus plug link

[Link to Product](#)

**Illustration**

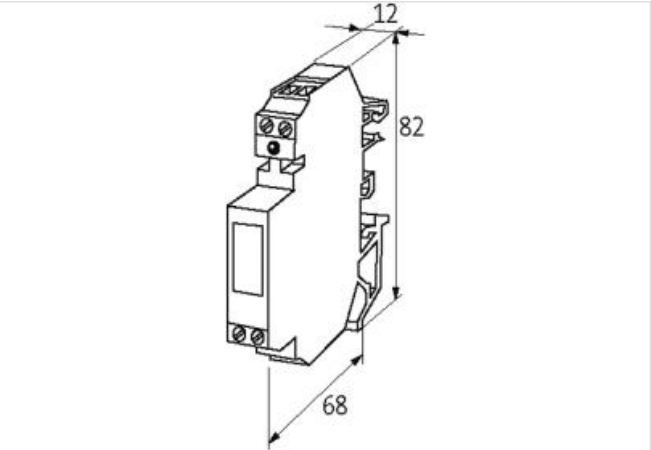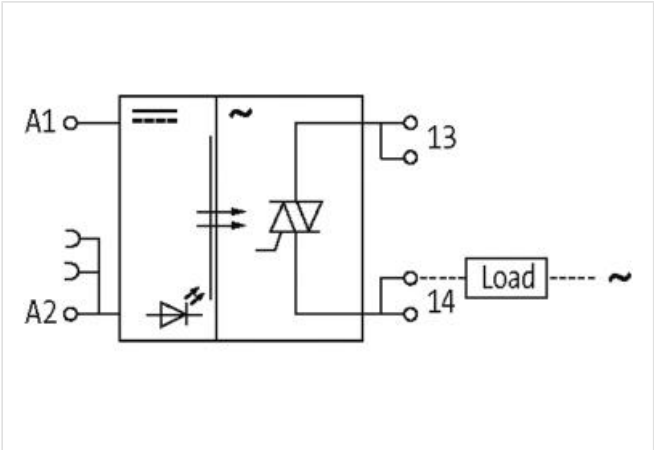

Product may differ from Image

General data	
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	68×12×82 mm
Output	
Leakage current (output is open)	max. 2 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1 V AC
Switching voltage	24...280 V AC
Switching frequency	max. 20/5 Hz (resist./ind.)

Switching current per output 50 mA...2 A

**Input**

Plug link (supplied) Art-No. 90960

Voltage range OFF 0...3 V DC

Voltage range ON 10...35 V DC

LED display LED (red)

Input current 6 mA

Product article number of manufacturer 50092