


MIRO TR 70-130VAC/DC SK OPTO-COUPLER MODULE

IN: 130 VAC/DC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A
110 V AC/DC
Screw terminals

[Link to Product](#)

Illustration

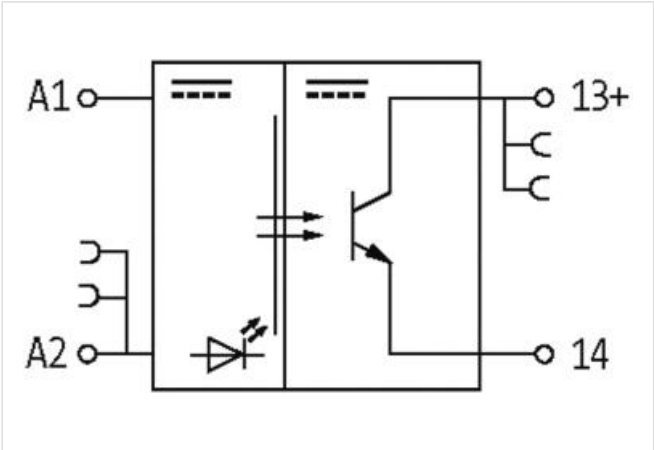

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm
Output	

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	100/700 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 500/30 Hz (resist./ind.)
Switching current per output	0.1 mA...0.5 A

Input

Control current	6 mA
Voltage range OFF	0...30 V AC/DC
Voltage range ON	70...130 V AC/DC
LED display	LED (yellow)

Product article number of manufacturer	52506
--	-------