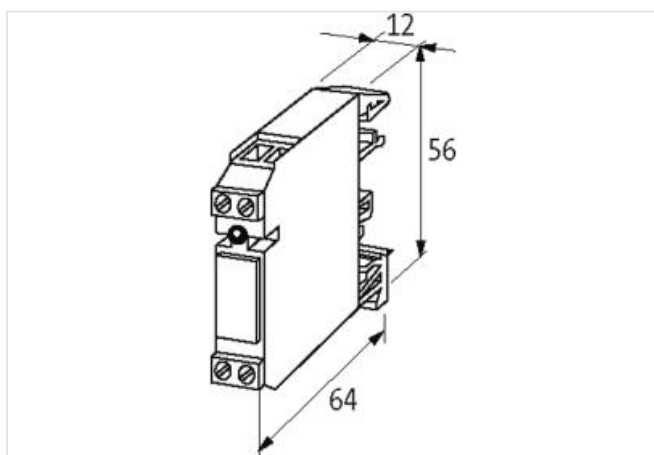
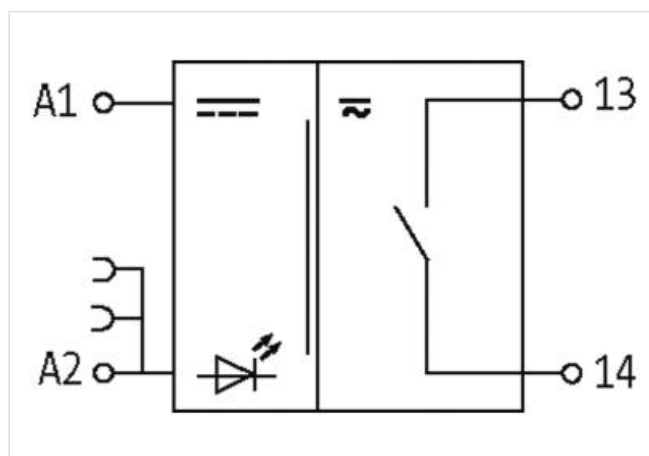


RMME 11/24 WITH GROUND BRIDGE INPUT RELAY

IN: 24 VAC/DC - OUT: 125 VAC/DC / 1 A

1 relay; 1 NO contact
 1 A
 24 V AC/DC
 with minus plug link
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	1.5 kV
Mech./ elect. life	100 000 000 switching cycles/load dependent
Dimensions HxWxD	56x12x65 mm

Output

Min. load current	1 mA
Contact material	Pd Ni-Au Rh
Energize/release/contact bounce time	10/10/1 ms

Switching voltage	max. 125 V AC/DC
-------------------	------------------

Switching frequency	max. 15 Hz
---------------------	------------

Power rating (voltage dependent)	max. 60 VA/30 W
----------------------------------	-----------------

Switching current per output	max. 1 A
------------------------------	----------

Input

Plug link (supplied)	Art-No. 90960
----------------------	---------------

Connection voltage - current	24 V AC/DC (21.6...26.4 V AC/DC) - 6 mA
------------------------------	---

LED display	LED (yellow)
-------------	--------------

Utilization category

AC-15	1 A (24 V AC); 0.5 A (125 V AC)
-------	---------------------------------

DC-13	1 A (24 V DC); 0.5 A (125 V DC)
-------	---------------------------------

Product article number of manufacturer	51860
--	-------