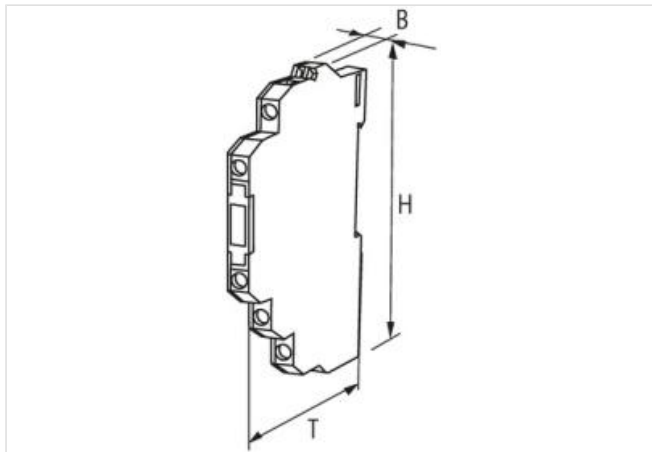
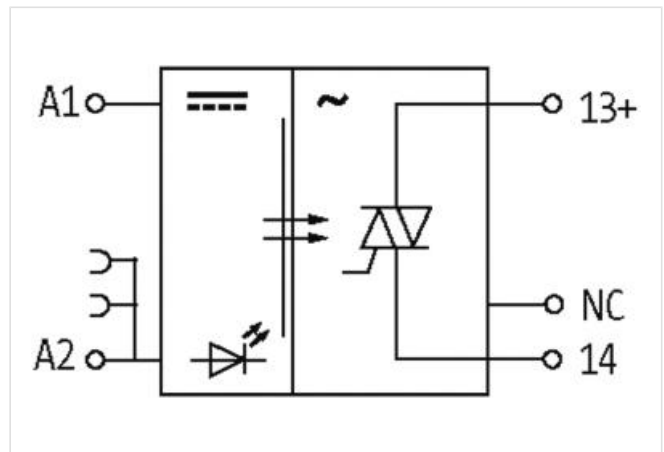


MIRO TH 24VDC SK 5P OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
with auxiliary common contacts
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x71 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	12...250 V AC
Switching frequency	max. 20 Hz, depending on suppression
Switching current per output	1 mA...0.5 A
Input	
Control current	6 mA
Voltage range OFF	0...3 V DC
Voltage range ON	10...44 V DC
LED display	LED (yellow)
Product article number of manufacturer	52560