



EMMDS 30-64/0,1 OPTO-COUPLER MODULE

IN: 230 VAC - OUT: 40 VDC / 0,1 A

Transistor 0.1 A
230 V AC
Double terminals on the output side

Link to Product

Illustration

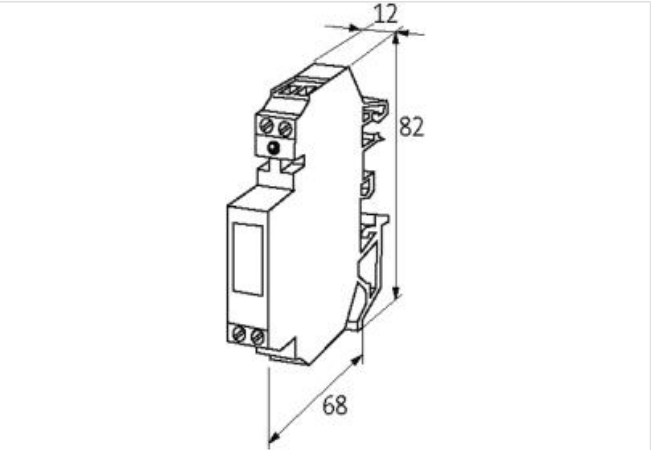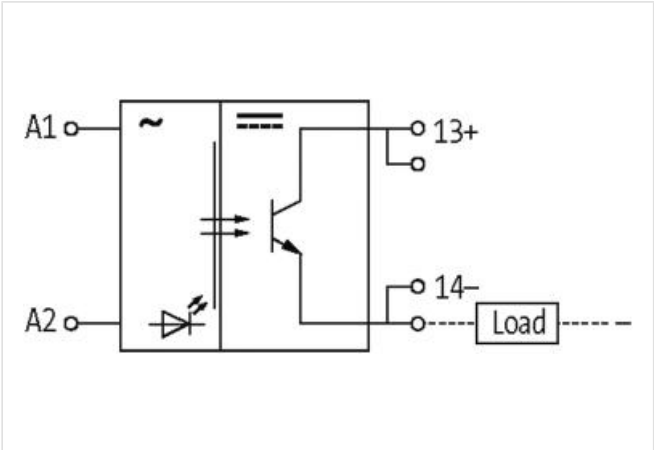

Product may differ from Image

General data	
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	82×12×64 mm
Output	
Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	50/120 ms
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	4...40 V DC
Switching frequency	max. 10/1 Hz (resist./ind.)

Switching current per output 1 mA...0.1 A

Input

Voltage range OFF 0...110 V AC

Voltage range ON 195...253 V AC

LED display LED (red)

Input current 7.5 mA

Product article number of manufacturer 50110