



MIRO 6.2 115-1U OUTPUT RELAY WITH LEAKAGE

CURRENT SUPPRESSION

- 1 NO/NC contact
- 6 A
- 115 V AC/DC
- Screw terminals

[Link to Product](#)

Illustration

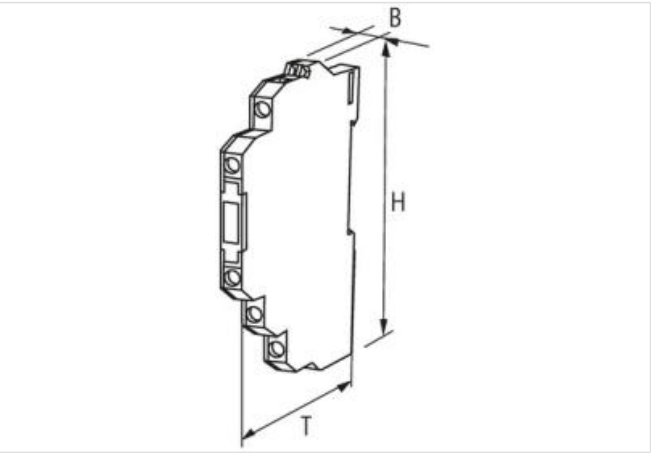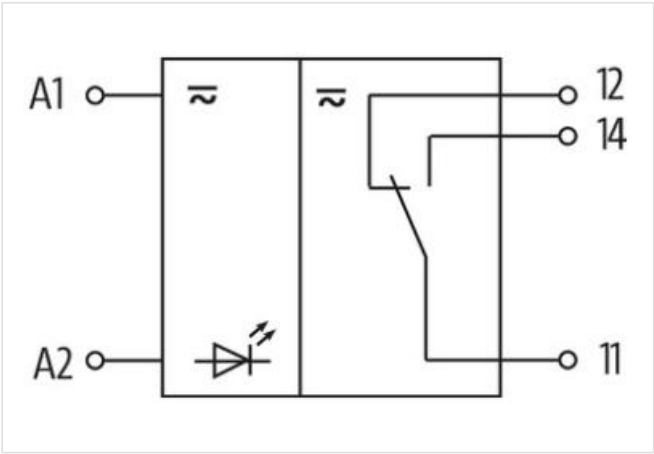

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Protection	IP20
Dimensions H×W×D	91×6.2×71 mm
Output	

Min. load current	100 mA
Contact material	Ag Sn O2
Energize/release/contact bounce time	12/5/3 ms
Switching voltage	max. 250 V AC/DC
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching current per output	max. 6 A
Input	
Connection voltage - current	115 V AC/DC (92...132 V AC/DC) - 8 mA
LED display	LED (green)
Utilization category	
AC-15	3 A (24/110/230 V AC)
AC-12	6 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
Product article number of manufacturer	52032