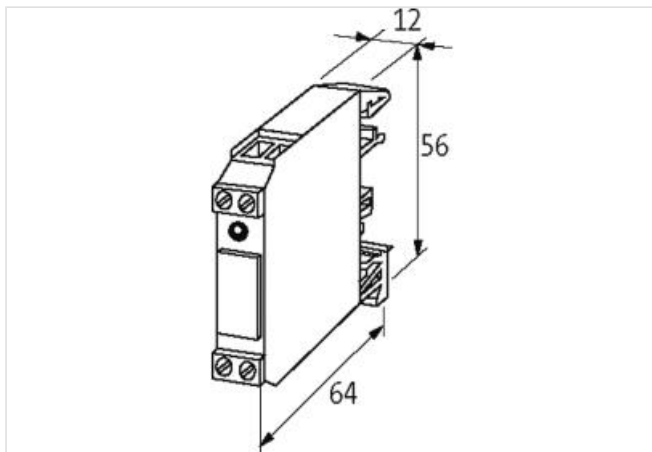
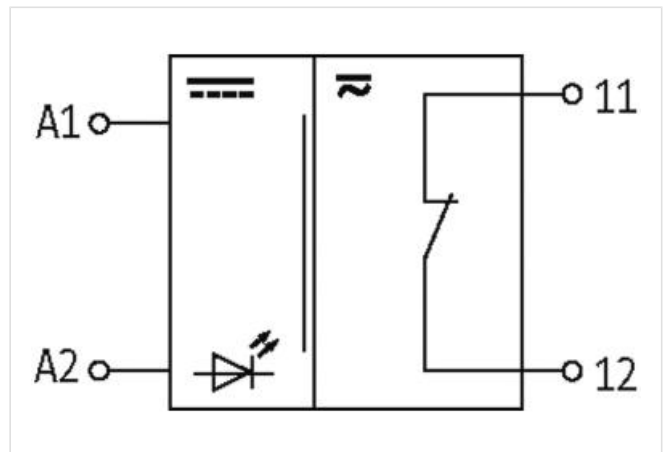


RMMR 11/230 AC OUTPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NC contact
 5 A
 230 V AC
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

| | |
|------------------------|--|
| Mounting method | DIN-rail mountable TH35 or G32 (EN 60715) |
| Temperature range | -20...+60 °C |
| Test isolation voltage | 4.0 kV |
| Mech./ elect. life | 20 000 000 switching cycles/load dependent |
| Dimensions HxWxD | 56x12x65 mm |

Output

| | |
|--------------------------------------|----------------------|
| Min. load current | 100 mA |
| Contact material | Ag Ni 0.15 hv; Ag hv |
| Energize/release/contact bounce time | 10/15/1.5 ms |
| Switching voltage | max. 250 V AC/DC |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

| | |
|--|--|
| Switching frequency | max. 10 Hz |
| Power rating (voltage dependent) | max. 1250 VA/240 W |
| Switching current per output | max. 5 A |
| Input | |
| Connection voltage - current | 230 V AC/DC (195...250 V AC/DC) - 4 mA |
| LED display | LED (red) |
| Utilization category | |
| AC-15 | 3 A (24/110/230 V AC) |
| AC-12 | 5 A (24/110/230 V AC) |
| DC-13 | 1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC) |
| Product article number of manufacturer | 51562 |