

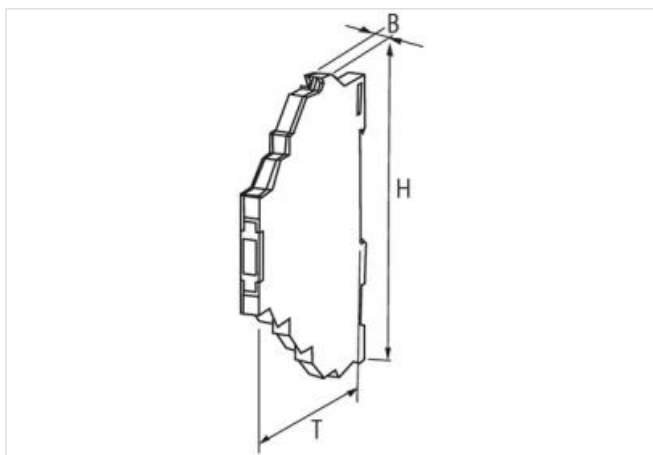
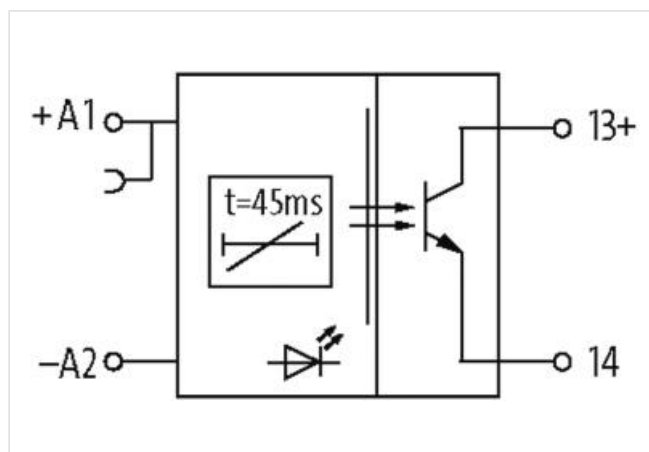
MIRO 6.2 TIMER

Impulsverlängerung 24 VDC / 25 mA / 45 ms

Transistor output

Impulse expansion: 40...45 ms

Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	no galvanic separation
Dimensions H×W×D	91×6.2×70 mm

Output

Min. load current	0.1 mA
Switching voltage	2...30 V DC
Switching frequency	max. 20 Hz
Switching current per output	max. 25 mA

Product article number of manufacturer	3000-18512-0200030
--	--------------------