
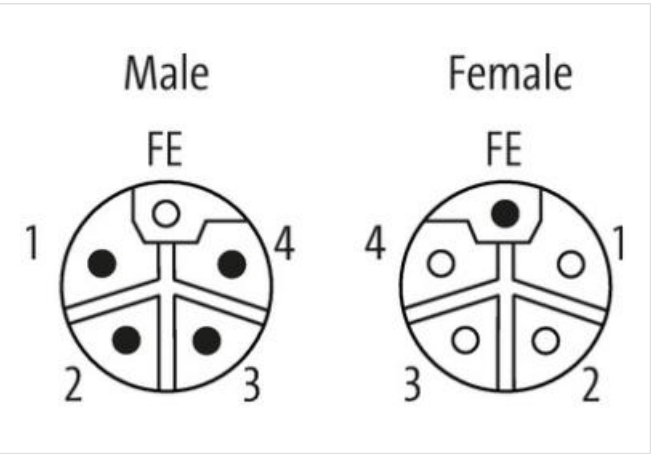


PROFINET Managed Switch 10x10/100BT IP67 Metal M12


PROFINET - Managed Switch  
M12 Power, 5-pole, L-coded  
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

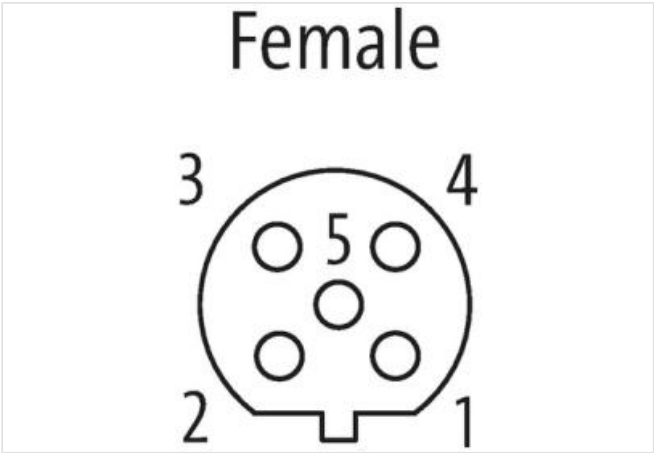

Product may differ from Image

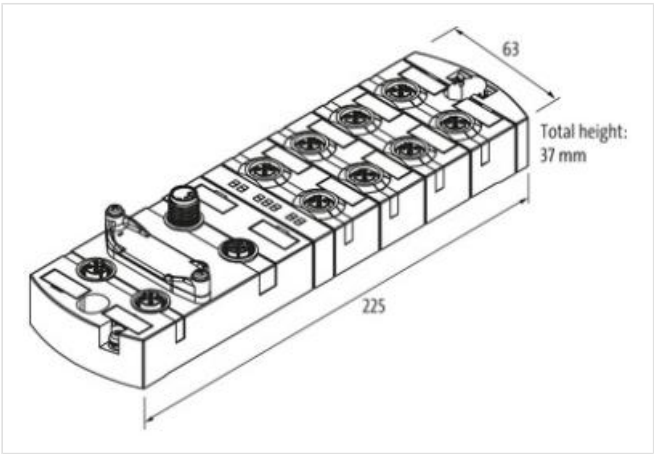

Technical Data	
Operating voltage	9...36 V
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation
General data	
Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal

Protection	IP67
Dimensions H×W×D	37×63×225 mm
<b>Connections</b>	
Fieldbus	10× M12 (female), D-coded
Supply	2× M12 Power, 5-pole, L-coded, 2× max. 16 A
<b>PROFINET</b>	
Specification	V2.4, Conformance Class B
Addressing	DCP
FSU (Fast-Start-Up)	no
PROFINET Netload Class	III
MRP	yes
Shared Device	no
<b>Switch Management</b>	
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch
Product article number of manufacturer	58851
<b>Diagnostic</b>	
Communication status	via LED, LLDP
Monitoring - no voltage	yes