

UFL 50 L PLUG FOR SIGNAL TRANSFER

24 VDC / 1 A - male with LED




Ribbon cable connector + LED

50-pole

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

Link to Product

Illustration

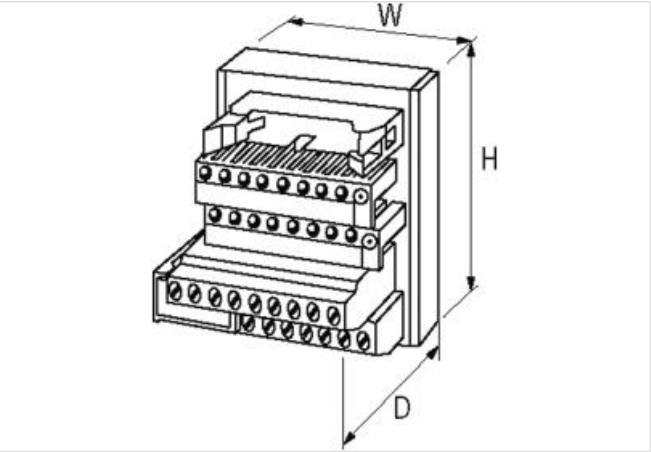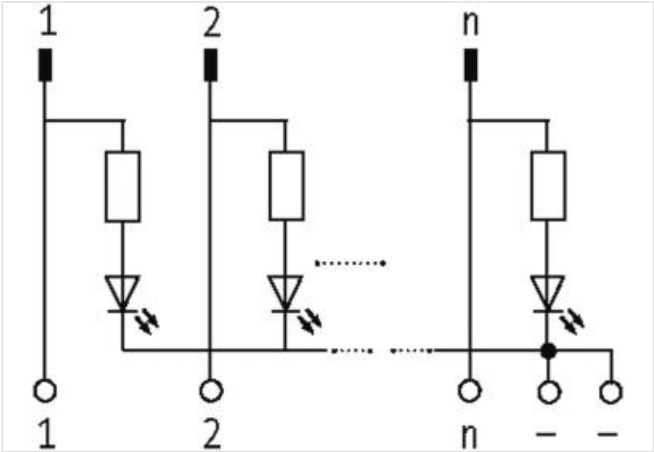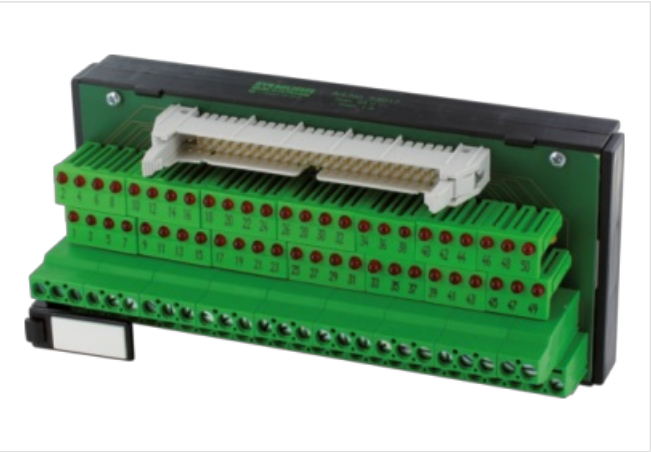

Product may differ from Image

Technical Data	
Operating voltage	24 V AC
Material group	EN 60664-1 over voltage, category II
LED display	LED (red) Ø 3 mm per pole, acc. to potential -
Plug connector	for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook
Operating current per bit	max. 1 A
General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+70 °C
Dimensions HxWxD	63x140x48 mm

Product article number of manufacturer 54017