

Xenterra 5TX unmanaged Switch 5 Port 1000Mbit

Xenterra 5TX GE

DIN-rail mountable TH35 (EN 60715)


Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration



Product may differ from Image

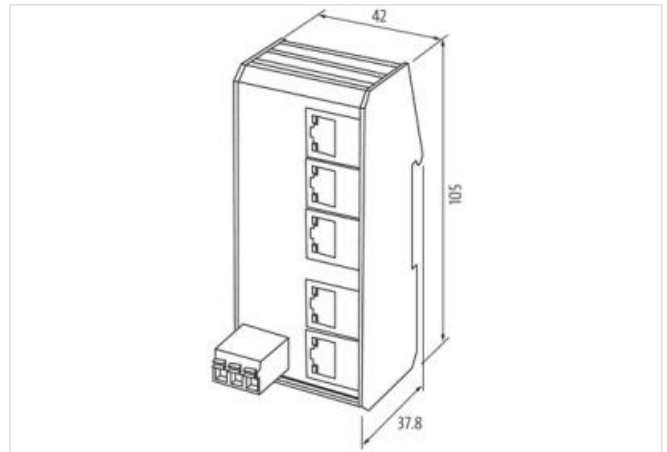

Technical Data

Operating voltage	8...28 V AC/9...36 V DC
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-40...+70 °C (storage temperature -40...+85 °C)
Housing	Metal black
Protection	IP20
Dimensions HxWxD	105x110x37.8 mm

Connections

Fieldbus	5x RJ45
Supply	Push-In spring clamp terminals, 0.2...2.5 mm ² (0.25...1.5 mm ²)

Switch Management

Protocols	no
Port Mirroring	no
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	no
Webserver	no
Switch Form	Unmanaged Switch

Product article number of manufacturer 58906

Diagnostic

Communication status via LED

Monitoring - no voltage yes