
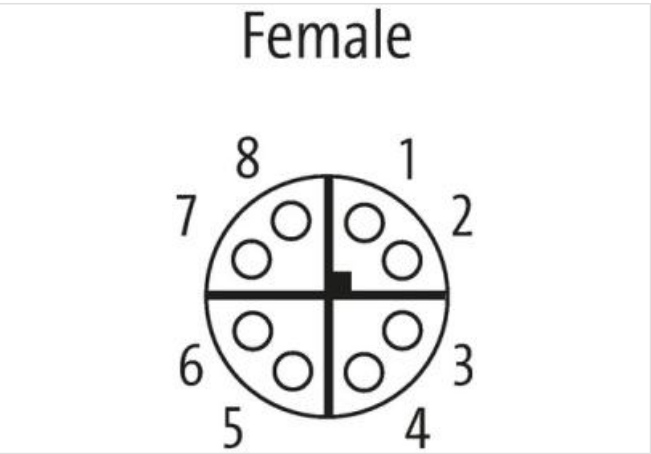


PROFINET Managed Switch 10x10/100/1000BT IP67 Metal M12


Connection cables are in the online shop under "Connection Technology".
M12 Power, 5-pole, L-coded
PROFINET - Managed Switch

Link to Product

Illustration

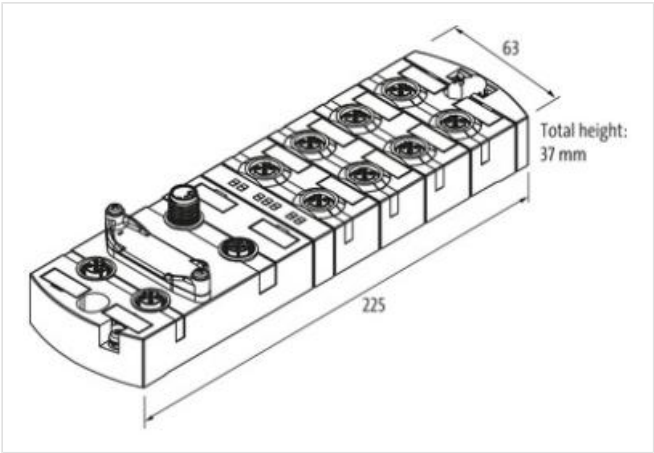

Product may differ from Image

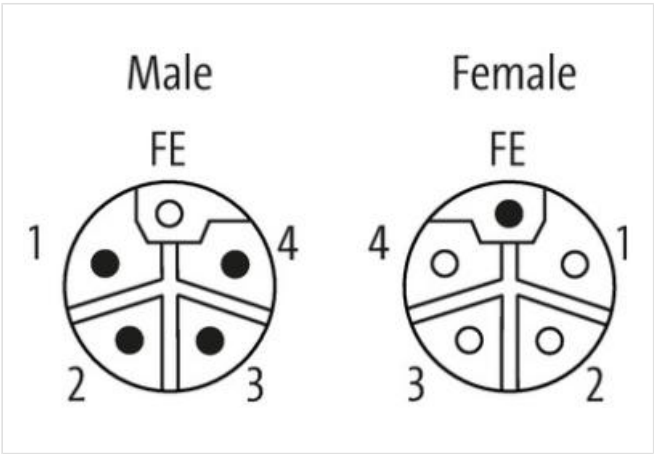

Technical Data	
Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation
General data	
Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal

Protection	IP67
Dimensions H×W×D	37×63×225 mm
Connections	
Fieldbus	10× M12 (female), X-coded
Supply	2× M12 Power, 5-pole, L-coded, 2× max. 16 A
PROFINET	
Specification	V2.4, Conformance Class B
Addressing	DCP
FSU (Fast-Start-Up)	no
PROFINET Netload Class	III
MRP	yes
Shared Device	no
Switch Management	
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch
Product article number of manufacturer	
58855	
Diagnostic	
Communication status	via LED, LLDP
Monitoring - no voltage	yes