
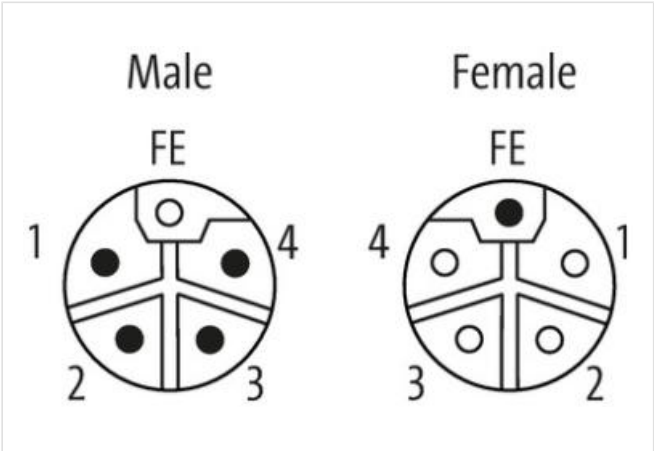
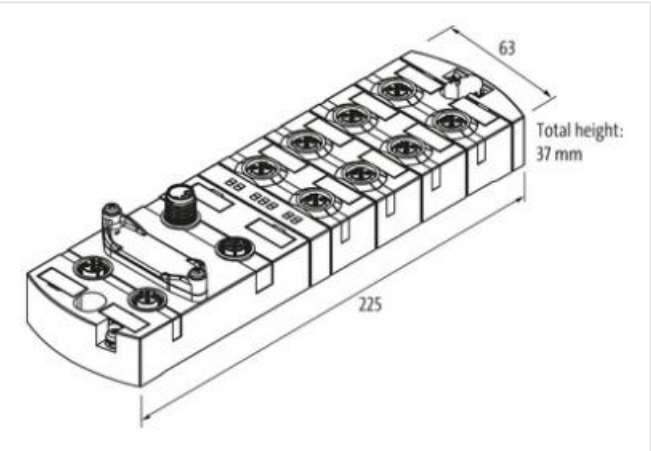


Managed Switch 10x10/100/1000BT IP67 Metal M12

M12 Power, 5-pole, L-coded
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

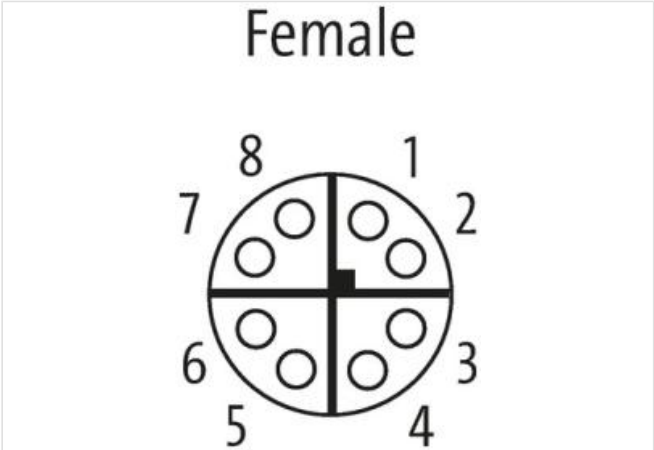

Product may differ from Image

Technical Data	
Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation
General data	
Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions HxWxD	37x63x225 mm
Connections	
Fieldbus	10x M12 (female), X-coded
Supply	2x M12 Power, 5-pole, L-coded, 2x max. 16 A

Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	Managed Switch

Product article number of manufacturer	58854
--	-------

Diagnostic

Communication status	via LED, LLDP
Monitoring - no voltage	yes