

## 6 TX managed switch with Gigabit

+ 4 power M12 IP67


Connection cables are in the online shop under "Connection Technology".

### [Link to Product](#)

#### Illustration



Product may differ from Image

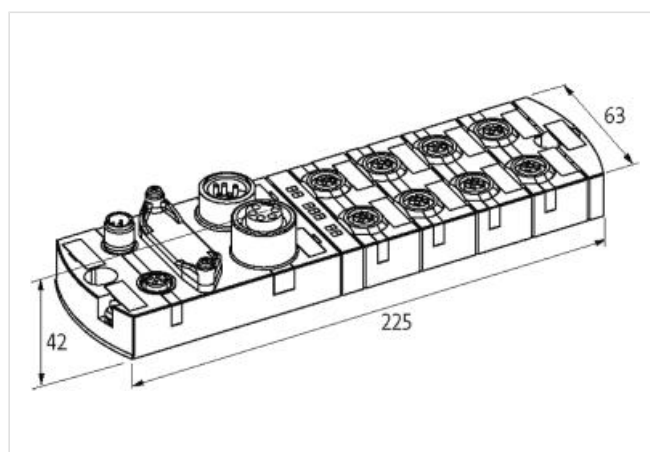

#### Technical Data

Operating voltage	18...28 V
Transfer rate	10/100/1000/2500 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

#### General data

Mounting method	2-hole screw mounting
Temperature range	-25 °C ... +45 °C
Housing	Metal
Protection	IP67
Dimensions H×W×D	225×63×42 mm

#### Connections

Fieldbus	6 × M12 (Buchse), x-kodiert 2 x 2500 Mbit, 4 x 1000 Mbit
----------	--

#### Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	Unmanaged Switch

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | [shop@murrinc.com](mailto:shop@murrinc.com) | [shop.murrinc.com](http://shop.murrinc.com)



---

Product article number of manufacturer	58860
--	-------

**Diagnostic**

Communication status	via LED, LLDP
----------------------	---------------

Monitoring - no voltage	yes
-------------------------	-----

---