


Managed Switch 8x10/100BT 2x10/100/1000BT IP67 Metal M12


M12 Power, 5-pole, L-coded Connection cables are in the online shop under "Connection Technology".


Link to Product

Illustration



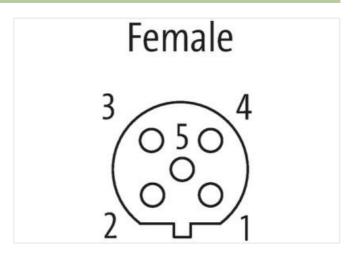

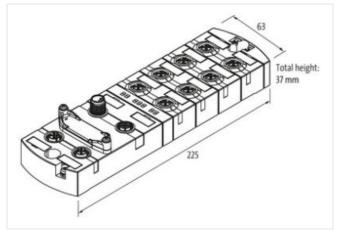

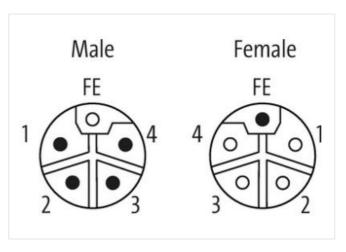

Product may differ from Image

Technical Data		
Operating voltage	936 V	
Transfer rate	10/100/1000 Mbit/s full duplex	
Operating modes	Autocrossing Autonegotiation	
General data		
Mounting method	2-hole screw mounting	
Temperature range	-25+70 °C,+70 °C derating (storage temperature -40+85 °C)	
Housing	Metal	
Protection	IP67	
Dimensions H×W×D	37×63×225 mm	
Connections		



stay	connected

Fieldbus	2× M12 (female), X-coded; 8× M12 (female), D-coded
Supply	2× M12 Power, 5-pole, L-coded, 2× max. 16 A
Switch Management	
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	Managed Switch
Product article number of manufacturer	58852
Diagnostic	
Communication status	via LED, LLDP
Monitoring - no voltage	yes