
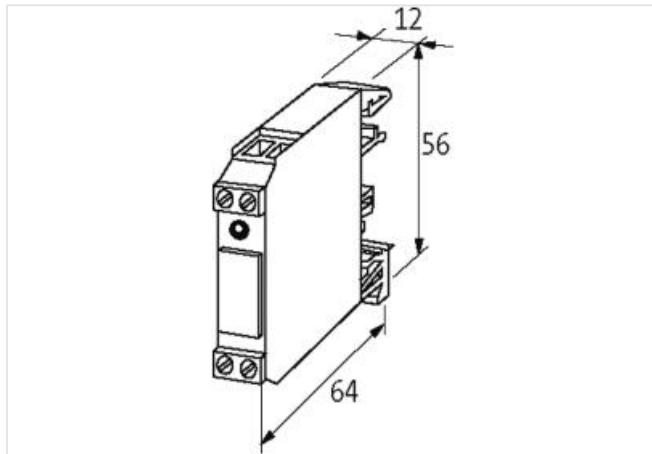


## AMMS 10-44/2 A OPTO-COUPLED MODULE

IN: 53 VDC - OUT: 40 VDC / 2 A

Transistor 2 A  
24 V DC[Link to Product](#)

## Illustration

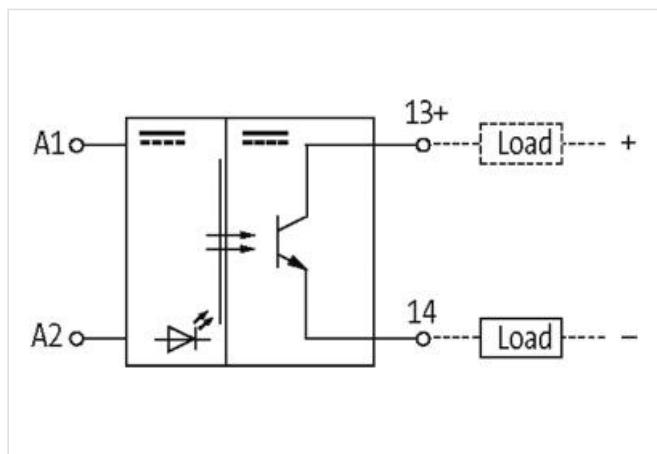

Product may differ from Image

## General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	56x12.5x64 mm

## Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	2/8 ms
Saturation voltage (across output)	max. 0.1 V DC
Switching voltage	4.5...40 V DC
Switching frequency	max. 20/5 Hz (resist./ind.)

Switching current per output 10 mA...2 A

**Input**

Voltage range OFF 0...3 V DC

Voltage range ON 10...53 V DC

LED display LED (red)

Input current 6 mA

Product article number of manufacturer 50070