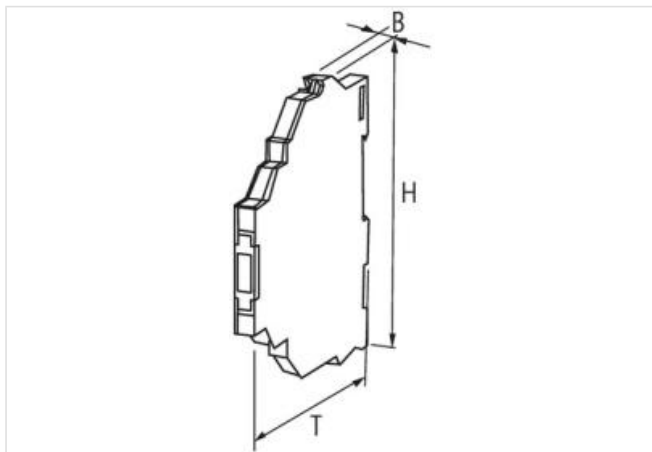
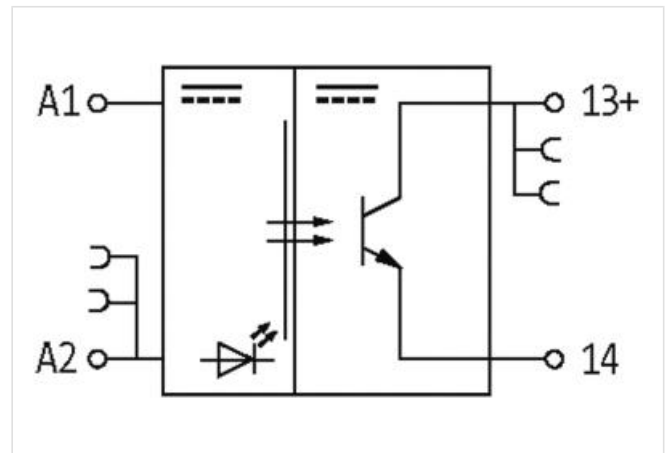


MIRO TR 24VDC 24VDC 10A FK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 10 A

Transistor 10 A
 24 V DC
 short-circuit and overload protected
 pulse switching
 Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Output	
Leakage current (output is open)	max. 25 μ A
Switching time ON/OFF	2/5 ms (10 A load)
Saturation voltage (across output)	max. 0.12 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1/0.1 Hz (resist./ind.)
Switching current per output	1 mA...10 A, short-circuit and overload protected (pulse switching)
Input	
Control current	10 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)
Product article number of manufacturer	6652521