



MIRO TR 24VDC SK 5P OPTO-COUPLER MODULE

IN: 48 VDC - OUT: 35 VDC / 2 A

Transistor 2 A
24 V DC
Short-circuit protected
Switching frequency: max. 1 kHz
Screw terminals

[Link to Product](#)

Illustration

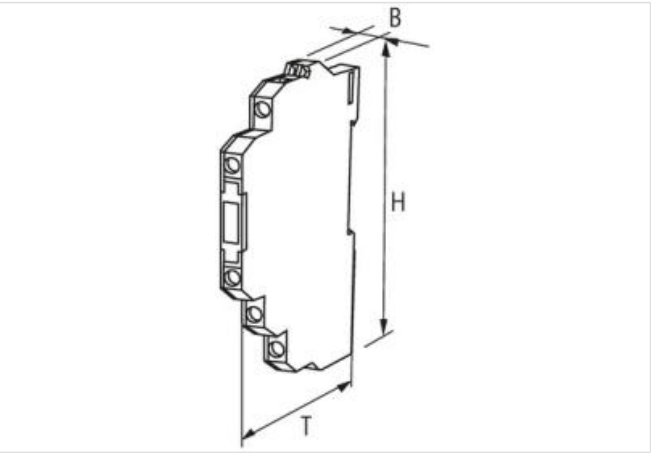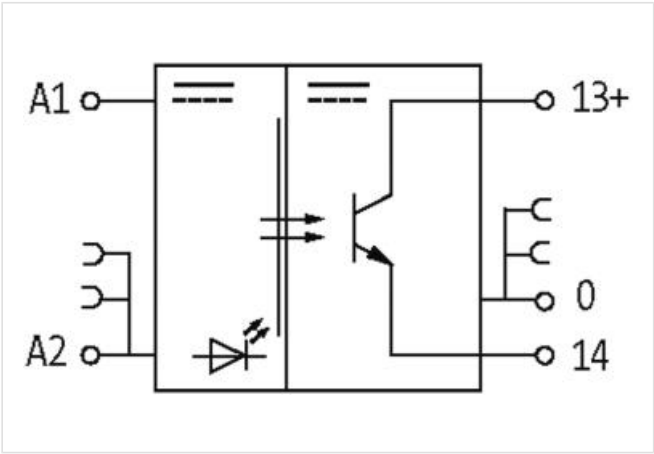

Product may differ from Image



| General data | |
|------------------------|--------------------------------|
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -20...+60 °C |
| Test isolation voltage | 3.75 kV |
| Housing | Black plastic, flame retardant |
| Dimensions H×W×D | 91×6.2×71 mm |

| Output | |
|--|--------------------------------------|
| Leakage current (output is open) | max. 0.1 mA |
| Switching time ON/OFF | 90/120 µs |
| Saturation voltage (across output) | max. 1.2 V DC |
| Switching voltage | 10...35 V DC |
| Switching frequency | max. 1 kHz |
| Switching current per output | 1 mA...2 A (short-circuit protected) |
| Input | |
| Control current | 6 mA |
| Voltage range OFF | 0...5 V DC |
| Voltage range ON | 10...48 V DC |
| LED display | LED (yellow) |
| Product article number of manufacturer | 52503 |