



AMS 4-10/44-2 OPTO-COUPLER MODULE

In: 24 VDC - Out: 24 VDC / 2A

Transistor 2 A (4-way)  
4 NO contacts  
24 V DC

[Link to Product](#)

Illustration

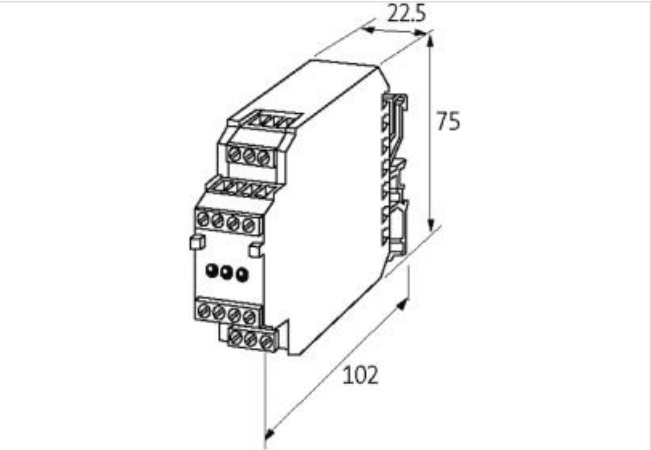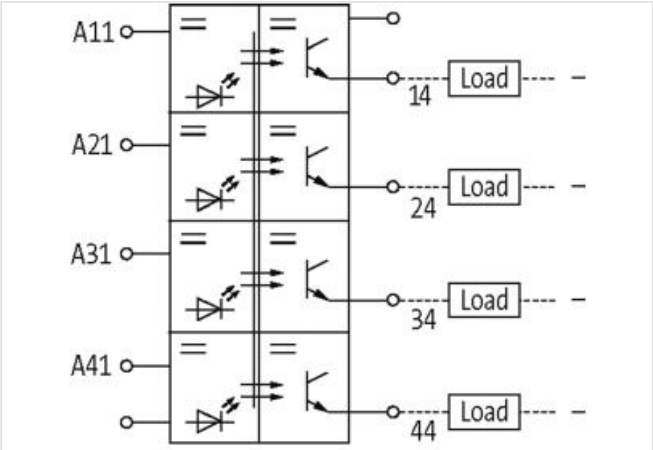

Product may differ from Image



General data	
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+50 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	75x22.5x102 mm
Output	

Leakage current (output is open)	max. 0.01 mA
Switching time ON/OFF	1/5 ms
Saturation voltage (across output)	max. 0.05 V DC
Switching voltage	5...30 V DC
Switching frequency	max. 10/1 Hz (resist./ind.)
Switching current per output	1 mA...2 A
<b>Input</b>	
Voltage range OFF	0...6 V DC
Voltage range ON	20...30 V DC
LED display	LED (yellow)
Input current	27 mA
Product article number of manufacturer	50015