



MIRO 6.2 OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 6 A

Transistor 6 A
24 V DC
Spring clamp terminals

[Link to Product](#)

Illustration

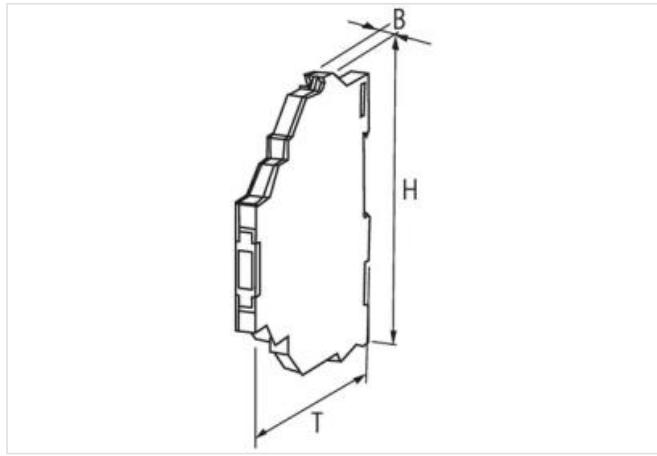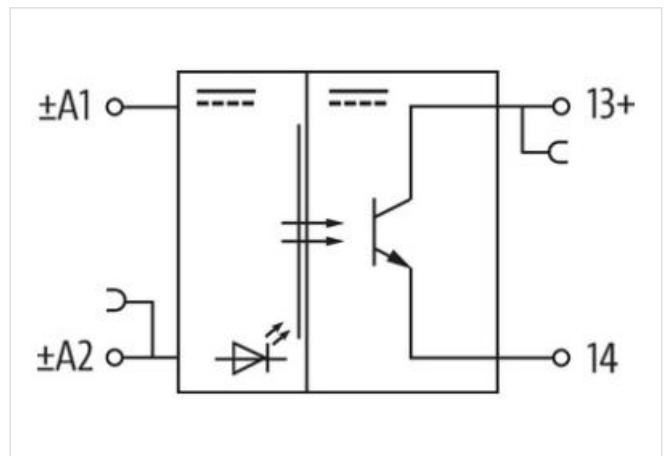

Product may differ from Image



General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Leakage current (output is open)	max. 25 µA
Switching time ON/OFF	2/5 ms
Saturation voltage (across output)	max. 0.1 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1/0.1 Hz (resist./ind.)
Switching current per output	1 mA...6 A (without derating)

Input

Control current	10 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

Product article number of manufacturer	6652519
----------------------------------------	---------