
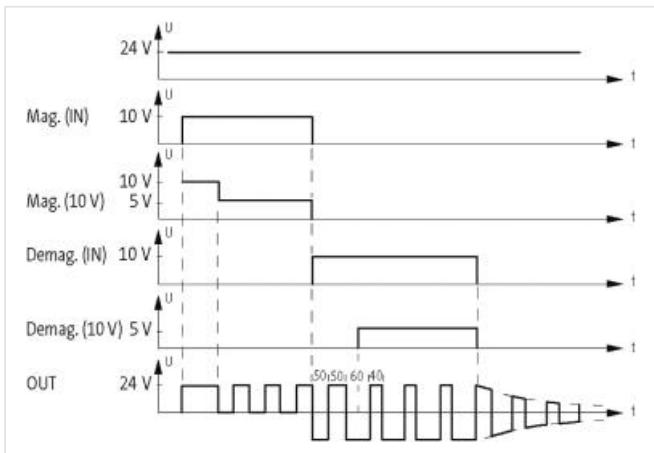
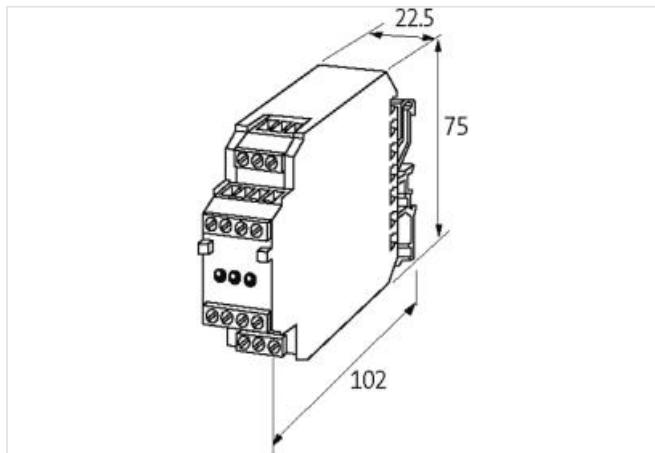


DEMAGNETIZER 1,5 A

INPUT: 24 V DC
 OUTPUT: 24 V DC
 max. 1.5 A (short-circuit protected)
 Screw terminals

[Link to Product](#)

Illustration

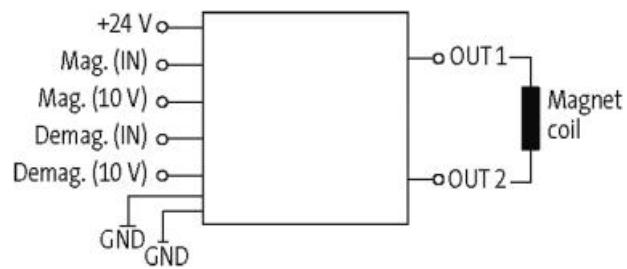

Product may differ from Image

Technical Data

Operating voltage 24 V DC (18...30 V DC)

Operating current approx. 40 mA

LED display LED (green)

Invers-polarity protection yes

General data

Mounting method DIN-rail mountable (EN 60715)

Temperature range -25...+50 °C (storage temperature -40...+80 °C)

Protection IP20

Connection Screw terminals

Dimensions H×W×D 75×22.5×102 mm

Output

Output voltage	24 V DC
PWM frequency	approx. 800 Hz
Output current	max. 1.5 A (short-circuit protected)
Input	
Demagnetization (analog)	0...10 V (44...55%)
Input resistor	approx. 10 kΩ
Magnetization (digital)	safe OFF: max. 1V; safe ON: min. 5V (LED yellow)
Magnetization (analog)	0.8...8.8 V (0...100%)
Demagnetization (digital)	safe OFF: max. 1V; safe ON: min. 5V (LED yellow)
Product article number of manufacturer	446140