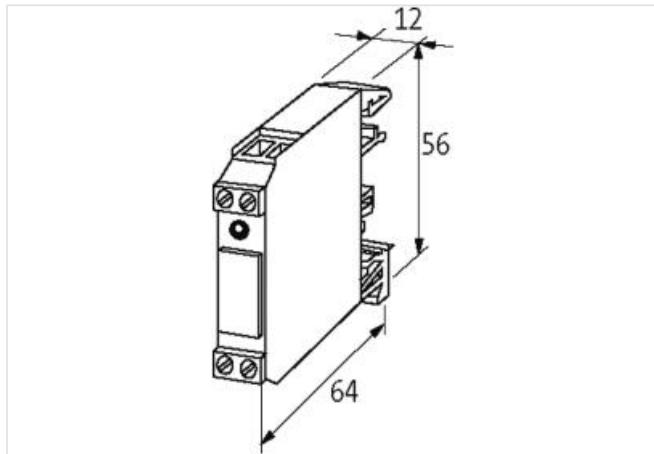
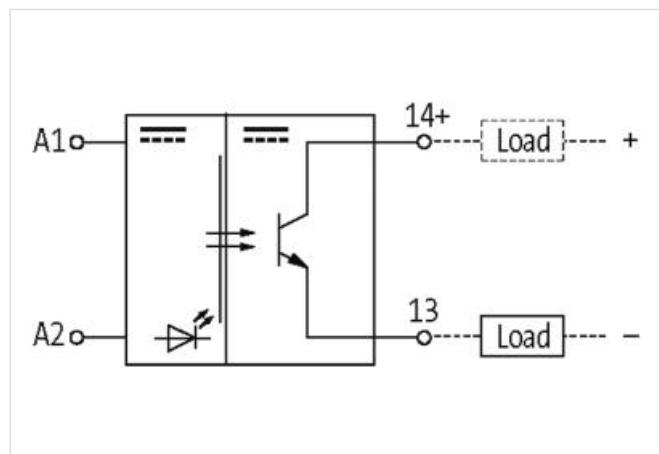


AMMS 10-44/1 OPTO-COUPLED MODULE

IN: 53 VDC - OUT: 45 VDC / 1,2 A

Transistor 1.2 A
10...30 V DC[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method DIN-rail mountable (EN 60715)

Temperature range -20...+60 °C

Test isolation voltage 3.75 kV

Housing Black plastic, flame retardant

Output

Leakage current (output is open) max. 0.3 mA

Switching time ON/OFF 65/65 µs

Saturation voltage (across output) max. 1.2 V DC

Switching voltage 4.5...30 V DC

Switching frequency 500 Hz (resist.)

Switching current per output 1 mA...1.2 A

Input

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Voltage range OFF	0...3 V DC
Voltage range ON	10...30 V DC
LED display	LED (red)
Input current	max. 8 mA
Product article number of manufacturer	503398