


INTERFACE TERMINAL RELAY

IN: 24 VDC - OUT: 24VDC / 0.2 A / 20 kHz

Transistor 0.2 A
24 V DC
Control current 2.8 mA (24 V DC)
Spring clamp terminals

[Link to Product](#)

Illustration

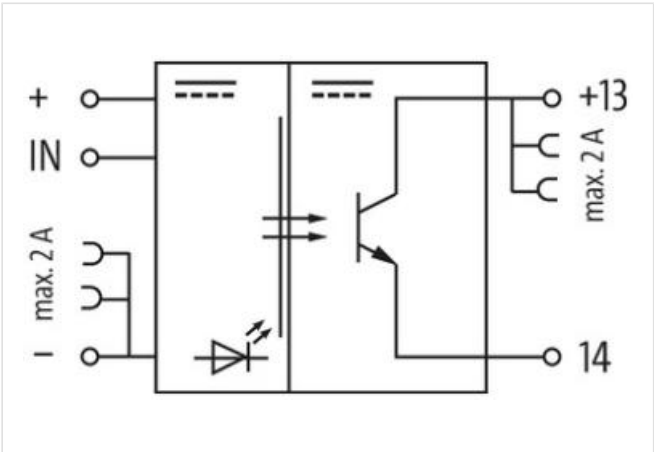

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x70 mm
Output	
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	14/20 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC

Switching frequency	max. 20 kHz
Switching current per output	0.1 mA...0.2 A

Input

Control current	2.8 mA (24 V DC)
Voltage range OFF	0...5 V DC
Voltage range ON	16...30 V DC
LED display	LED (yellow)

Product article number of manufacturer	526063
--	--------