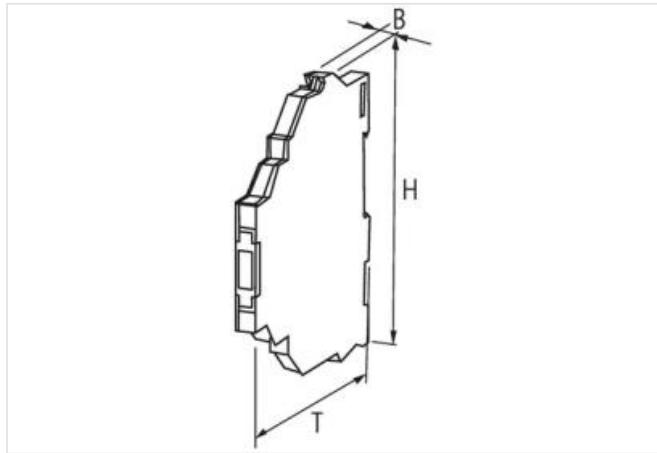
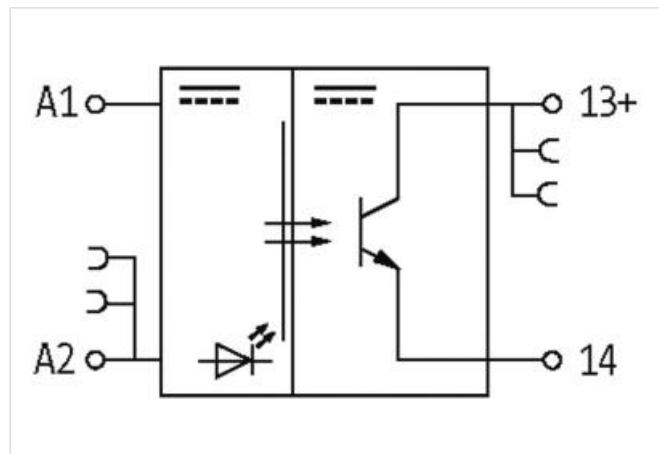


**MIRO TR 70-130VAC/DC FK OPTO-COUPLER MODULE**

IN: 130 VAC/DC - OUT: 48 VDC / 0,5 A

 Transistor 0.5 A  
 110 V AC/DC  
 Spring clamp terminals

[Link to Product](#)
**Illustration**


Product may differ from Image


**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

**Output**

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	100/700 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 500/30 Hz (resist./ind.)
Switching current per output	0.1 mA...0.5 A
<b>Input</b>	
Control current	6 mA
Voltage range OFF	0...30 V AC/DC
Voltage range ON	70...130 V AC/DC
LED display	LED (yellow)
Product article number of manufacturer	6652506