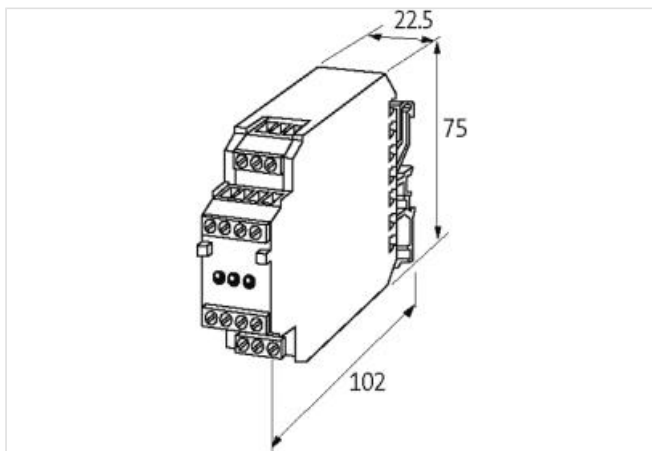
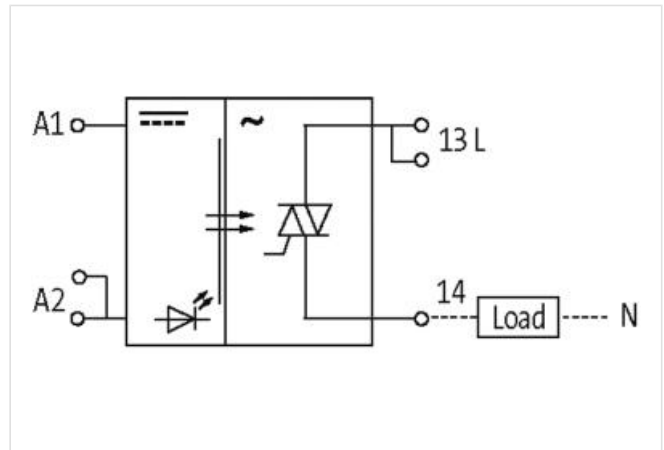


AMS 20-47/4 OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 4 A

Triac 4 A

Control voltage 230 V AC on request

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	6.0 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	75×22.5×85 mm

Output

Leakage current (output is open)	max. 10 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.4 V AC
Switching voltage	24...250 V AC
Switching frequency	max. 30/5 Hz (resist./ind.)

Switching current per output 10 mA...4 A

Input

Voltage range OFF 0...3 V DC

Voltage range ON 10...53 V DC

LED display LED (red)

Input current 10 mA

Product article number of manufacturer 50034