



INDUCTIVCOUPLER 24V 5A 30KHZ

Spring clamp terminals

Switching frequency: max. 30 kHz

Link to Product

Illustration

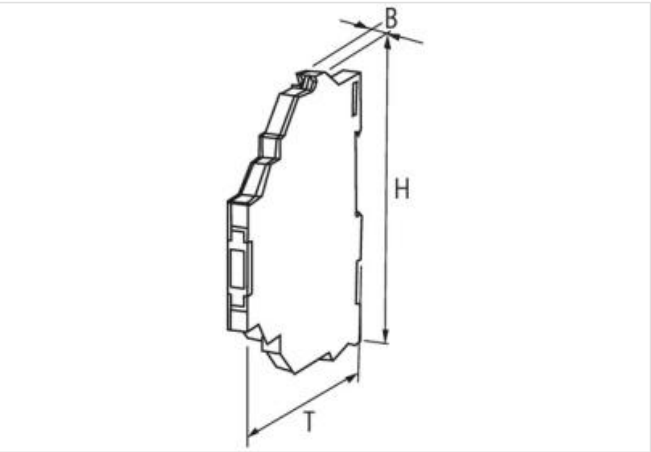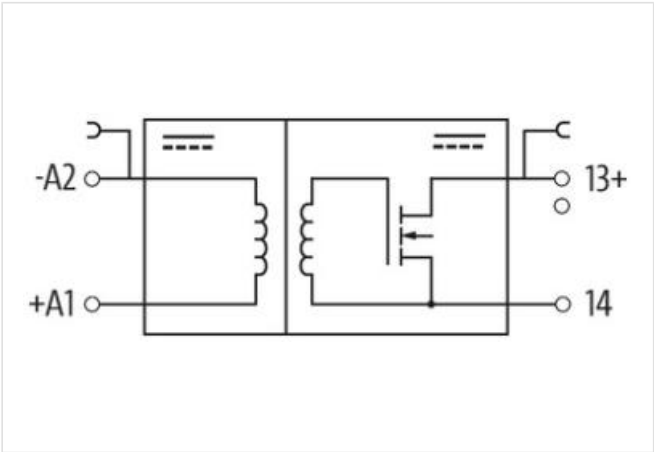

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	1.5 kV
Housing	Black plastic, flame retardant
Protection	IP20
Dimensions H×W×D	78×6.2×69 mm

Output	
Leakage current (output is open)	max. 25 μ A
Switching frequency	max. 30/3 kHz (resist./ind.)
Switching current per output	1 mA...5 A
Input	
Control current	32 mA/24 V DC
Voltage range OFF	0...5 V DC
Voltage range ON	15...30 V DC
LED display	LED (yellow)
Product article number of manufacturer	6652700