


MIRO TR 90-250VAC SK OPTO-COUPLER MODULE

IN: 250 VAC - OUT: 48 VDC / 2 A

Transistor 2 A
230 V AC
Screw terminals

[Link to Product](#)

Illustration

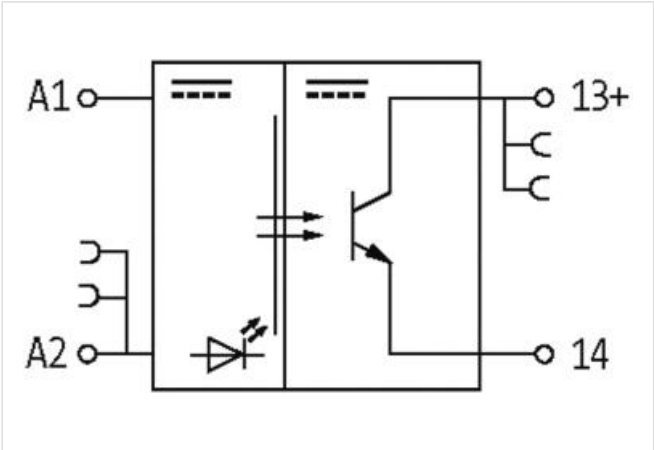

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm
Output	

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	3/10 ms
Saturation voltage (across output)	max. 0.3 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 10/1 Hz (resist./ind.)
Switching current per output	1 mA...2 A (without derating)

Input

Control current	15 mA
Voltage range OFF	0...30 V AC
Voltage range ON	90...250 V AC
LED display	LED (yellow)

Product article number of manufacturer	52508
--	-------