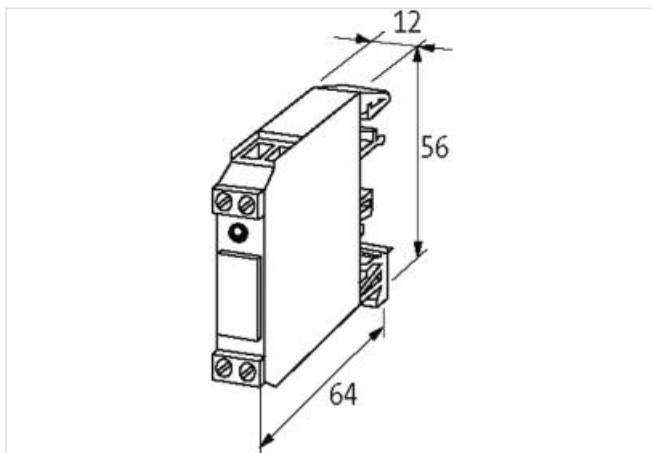
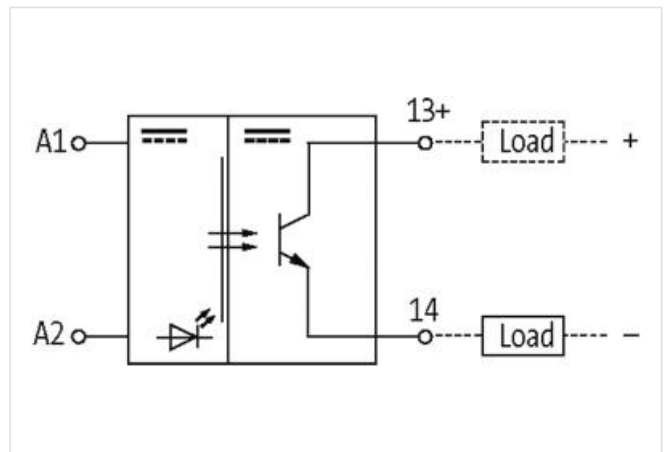


AMMS 18-1 OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 30 VDC / 1,2 A

Transistor 2 A
24 V DC[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant

Output

Switching time ON/OFF	1.5 µs/1 ms
Switching voltage	6...30 V DC
Switching frequency	max. 20 kHz
Switching current per output	1 mA...1.2 A
Output current	max. 1.2 A

Input

Voltage range ON	6...30 V DC
------------------	-------------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

LED display	LED (red)
Input current	8.5 mA (24 V DC)
Product article number of manufacturer	50201