




PKB 2 FOR SIGNAL TRANSFER

250V / 25 A

4× 22-pole
25 A per potential rail
Screw plug-in terminals
Input terminal: max. 6 mm² single core, total current: max. 100 A

[Link to Product](#)

Illustration

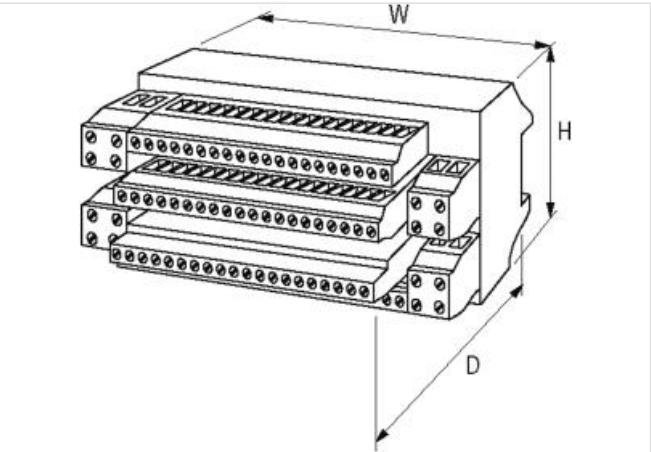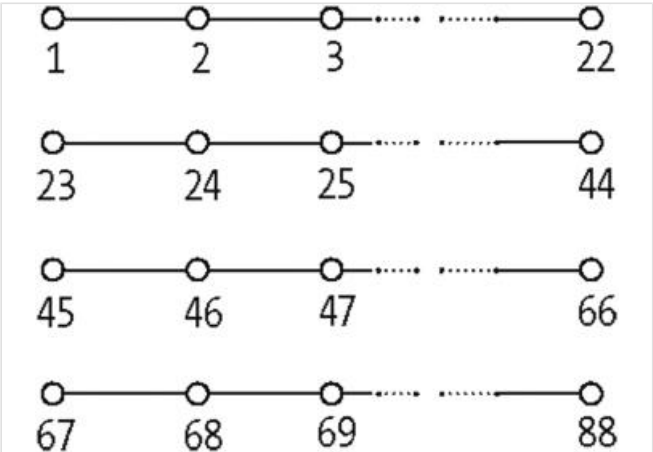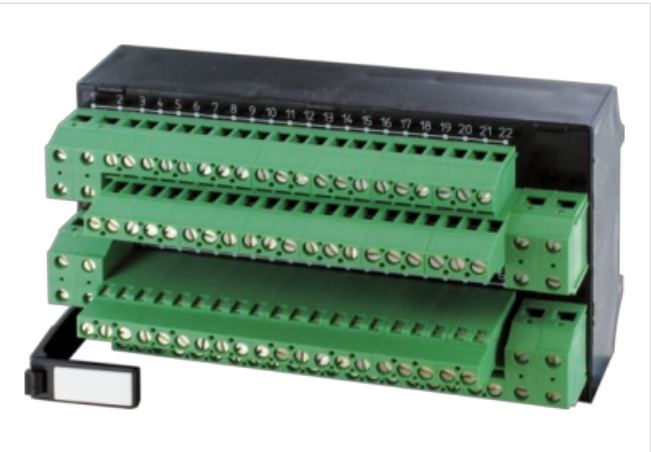

Product may differ from Image

Technical Data	
Operating voltage	250 V AC
Material group	EN 60664-1 over voltage, category II
Operating current per bit	25 A per potential rail
Total current	max. 100 A
General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Connection	Screw plug-in terminal: max. 4 mm², input terminal: max. 6 mm² single wire (AWG 9)
Dimensions H×W×D	75×135×66 mm

Product article number of manufacturer 54251