

## MIRO 6.2 OPTO-COUPLER MODULE

IN: 230 VAC/DC - OUT: 253 VAC/DC / 0,5 A


Multi voltage output  
Transistor 0.5 A  
24...230 V AC/DC  
Spring clamp terminals

### [Link to Product](#)

#### Illustration



Product may differ from Image

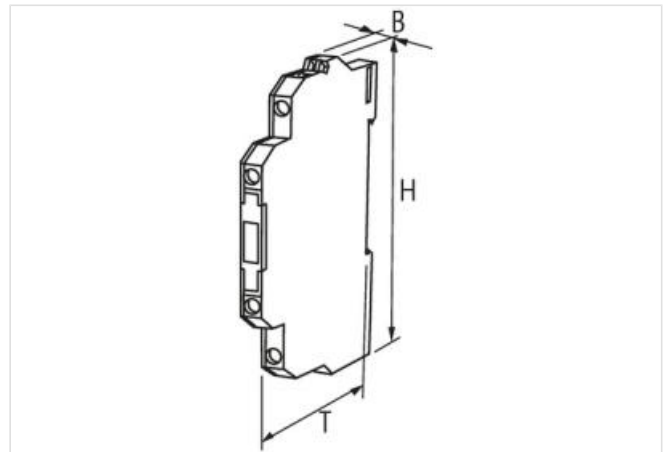

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm

#### Output

Leakage current (output is open)	max. 20 µA
Switching time ON/OFF	5/15 ms
Saturation voltage (across output)	max. 2.6 V AC/DC
Switching voltage	10...230 V AC/DC
Switching frequency	max. 2.5 Hz
Switching current per output	1 mA...0.5 A

#### Input

Control current	5 mA
Voltage range OFF	0...5 V AC/DC
Voltage range ON	10...230 V AC/DC
LED display	LED (yellow)

Product article number of manufacturer 6652573