


## **MIRO 6.2 IMPULSE EXTENSION MODULES**


IN: 24 VDC - OUT: 24 VDC / 0.1 A

Transistor output Impulse expansion: 0.1...10 s Screw terminals

## Link to Product

Illustration

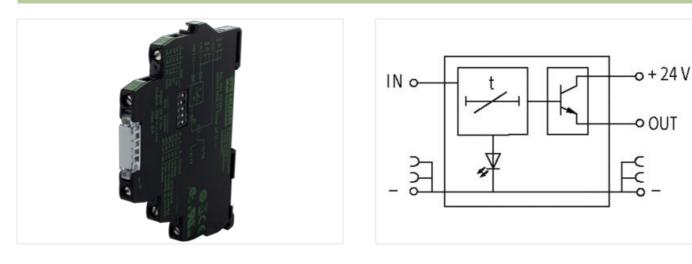

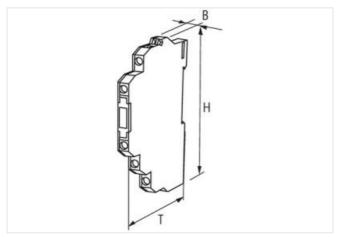

Product may differ from Image



General data		
Mounting method	DIN-rail mountable (EN 60715)	
Temperature range	0+60 °C	
Test isolation voltage	no galvanic separation	
Dimensions H×W×D	91×6.2×71 mm	
Output		
Output		

## Operating voltage -1.5 V Switching voltage

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com



Switching current per output	max. 100 mA	
Input		
Input voltage	1929 V DC	
Control voltage	1632 V DC	
Impulse length	min. 0.5 ms	
Time range	0.110 s	

Product article number of manufacturer 52320

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com