



INDUCTIVCOUPLER 24V 5A 30KHZ

Switching frequency: max. 30 kHz

Screw terminals

[Link to Product](#)

Illustration

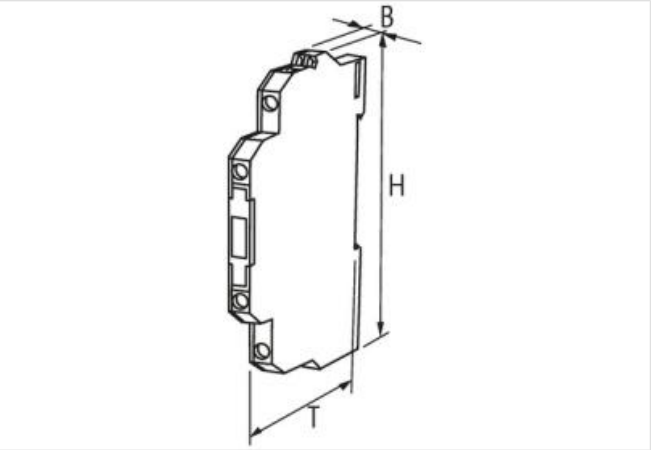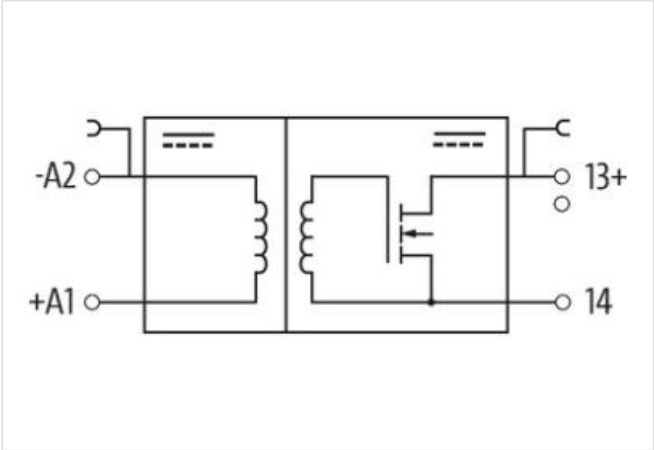

Product may differ from Image



General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	1.5 kV
Housing	Black plastic, flame retardant
Protection	IP20
Dimensions HxWxD	78x6.2x71 mm

**Output**

Leakage current (output is open)	max. 25 $\mu$ A
Switching frequency	max. 30/3 kHz (resist./ind.)
Switching current per output	1 mA...5 A

**Input**

Control current	32 mA/24 V DC
Voltage range OFF	0...5 V DC
Voltage range ON	15...30 V DC
LED display	LED (yellow)

Product article number of manufacturer	52700
--	-------