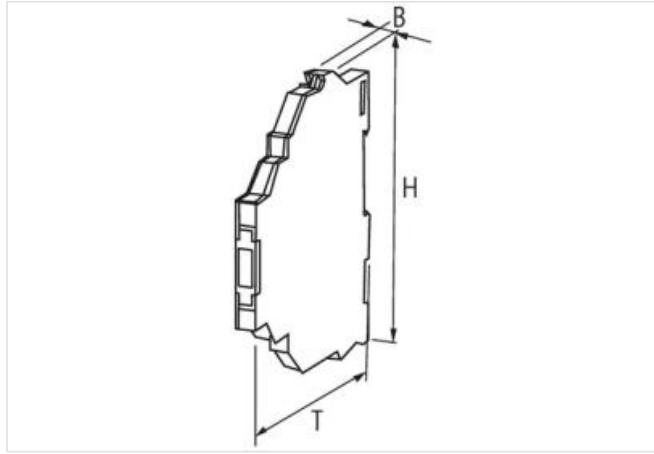
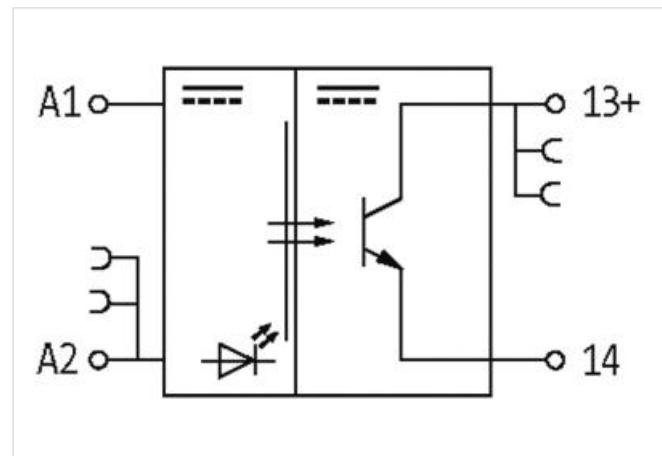


MIRO TR 48VDC FK OPTO-COUPLEX MODULE

IN: 56 VDC - OUT: 48 VDC / 0,5 A

 Transistor 0.5 A
 48 V DC
 Spring clamp terminals

[Link to Product](#)
Illustration


Product may differ from Image


General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Leakage current (output is open)	max. 10 µA
Switching time ON/OFF	20/100 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1 kHz/10 Hz (resist./ind.)
Switching current per output	0.1 mA...0.5 A
Input	
Control current	6 mA
Voltage range OFF	0...12 V DC
Voltage range ON	18...56 V DC
LED display	LED (yellow)
Product article number of manufacturer	6652505