


**MIRO 6.2 24VDC-250VAC/1A OPTO-COUPLER MODULE**

IN: 53 VDC - OUT: 250 VAC / 1 A

Triac 1 A  
53 V DC  
Screw terminals

[Link to Product](#)

Illustration

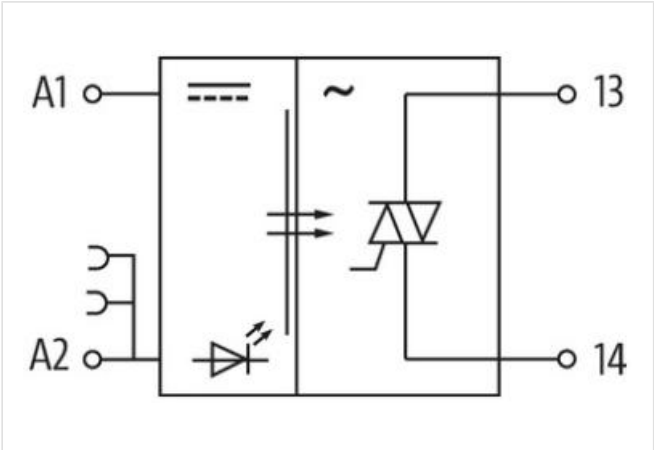

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm
Output	
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	12...250 V AC
Switching frequency	max. 2 Hz, depending on suppression

Switching current per output 10 mA...1 A

**Input**

Control current 12 mA (24 V DC)

Voltage range OFF 0...3 V DC

Voltage range ON 12...53 V DC

LED display LED (yellow)

Product article number of manufacturer 52571