



**MIRO 6.2 MULTI-TIMER TRANSISTOR SK**

IN: 24 VDC - OUT: 24 VDC / 0.1 A

Transistor output  
Impulse expansion: 10 ms...100 s  
Screw terminals

[Link to Product](#)

Illustration

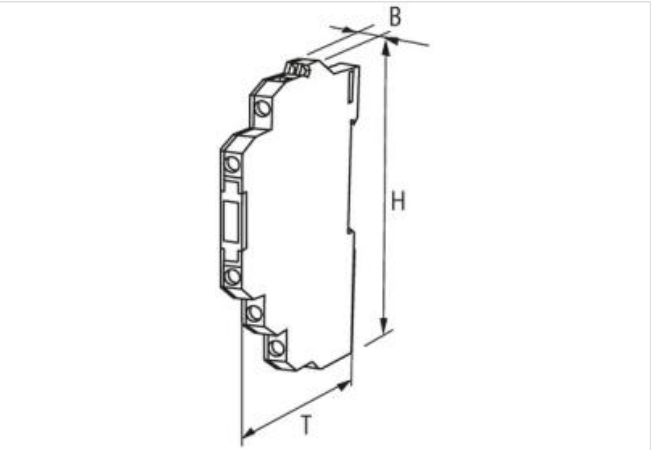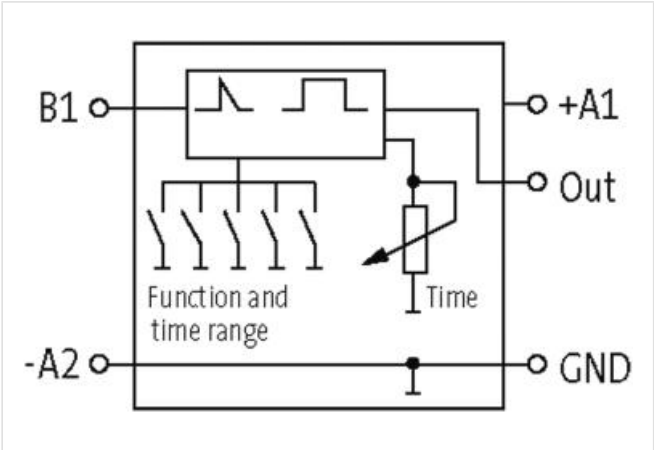

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	no galvanic separation
Dimensions H×W×D	91×6.2×71 mm
Output	
Min. load current	1 mA (short-circuit protected)
Switching voltage	Operating voltage -0.2 V
Switching frequency	max. 50 Hz
Switching current per output	max. 100 mA
Input	
Input voltage	18...30 V DC

Control voltage	18...30 V DC
-----------------	--------------

---

Product article number of manufacturer	3000-18502-0200010
--	--------------------