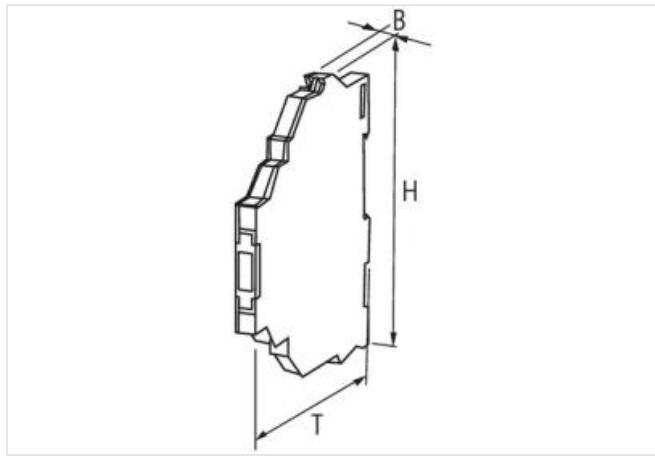
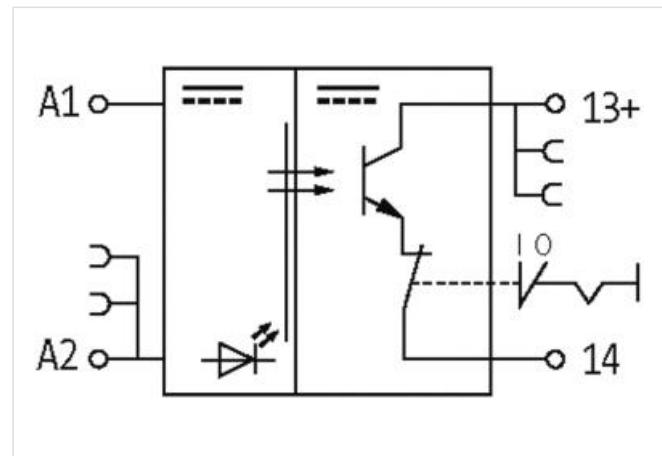


**MIRO TR 6.2MM FK OPTO-COUPлер MODULE**

IN: 48 VDC - OUT: 48 VDC / 2 A

Transistor 2 A  
 48 V DC  
 Isolation function in output circuit  
 Spring clamp terminals

[Link to Product](#)
**Illustration**


Product may differ from Image


**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm

**Output**

The information in this brochure has been compiled with the utmost care.

Liability for the correctness, completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	1/5 ms
Saturation voltage (across output)	max. 0.3 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 10/1 Hz (resist./ind.)
Switching current per output	1 mA...2 A

**Input**

Control current	7 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...48 V DC
LED display	LED (yellow)

Product article number of manufacturer	6652513
--	---------