

MIUW ANALOG COUPLER COMPONENT

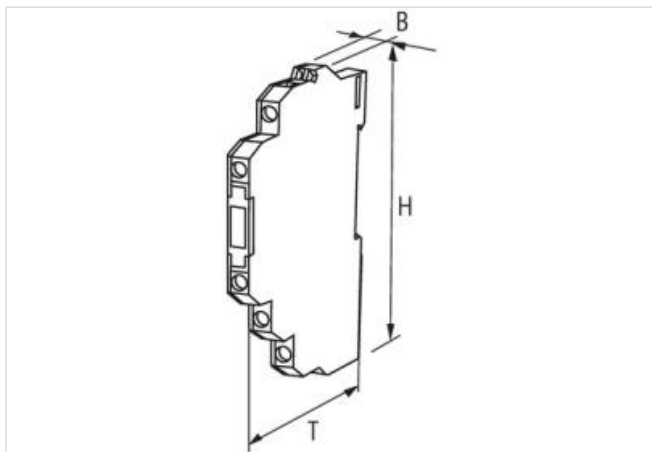
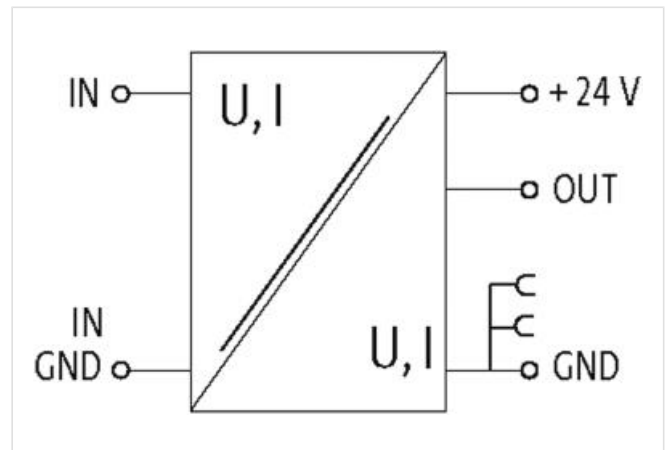
IN: 4..20 mA - OUT: 0..10 V

INPUT: 4...20 mA

OUTPUT: 0...10 V DC, 20 mA

Screw terminals

Input and output galvanically separated

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Operating voltage	24 V DC $\pm 20\%$, smoothed
Operating current	50...70 mA
Frequency	max. 500 Hz

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Test isolation voltage	1.5 kV
Dimensions H×W×D	91×6.2×71 mm

Voltage output signals

Load	max. 25 mA
------	------------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Product article number of manufacturer	44213
--	-------