

MPU UW ANALOG COUPLER COMPONENT



IN: 0..10 V - OUT: 0..10 V / 300 mA

INPUT: 0...10 V DC
OUTPUT: 0...10 V DC, 300 mA
Screw terminals

This product is a processing component and must only be used by authorized manufacturers or people.
Input and output galvanically separated

[Link to Product](#)

Illustration

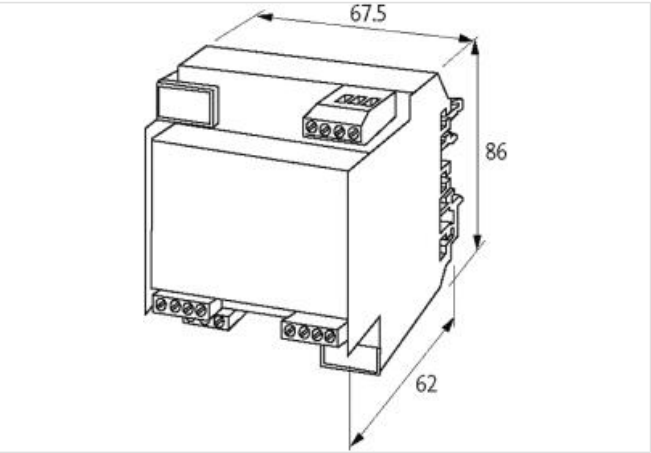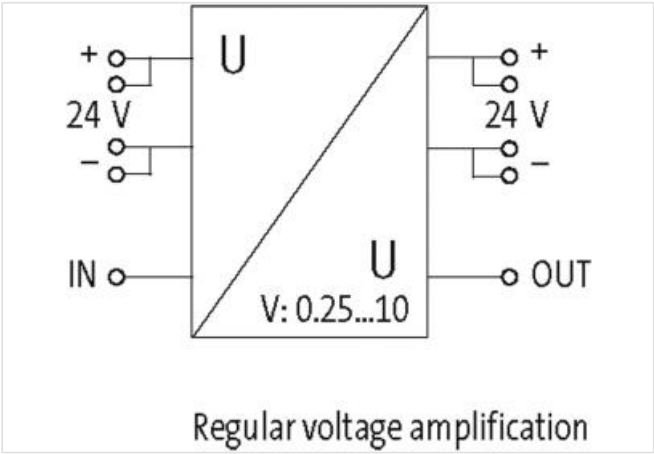

Product may differ from Image

Technical Data	
Operating voltage	24 V DC $\pm 20\%$, smoothed
Operating current	max. 300 mA
Frequency	max. 1 kHz
Tolerance	max. 0.5%
General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+50 °C
Dimensions HxWxD	62x86x67.5 mm
Voltage output signals	

Load max. 300 mA

Product article number of manufacturer 44201