

**MIUW ANALOG COUPLER COMPONENT**

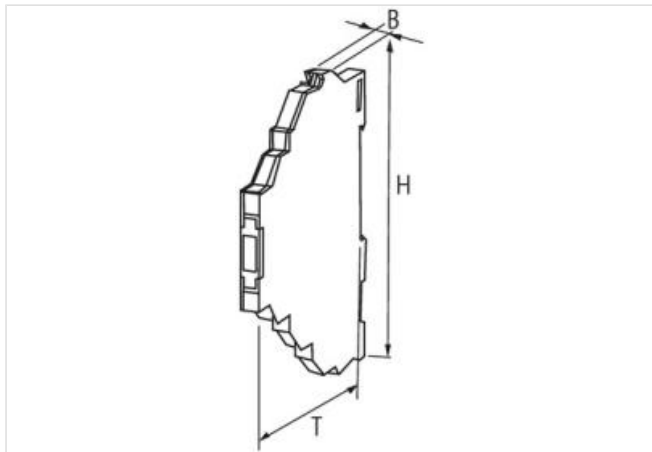
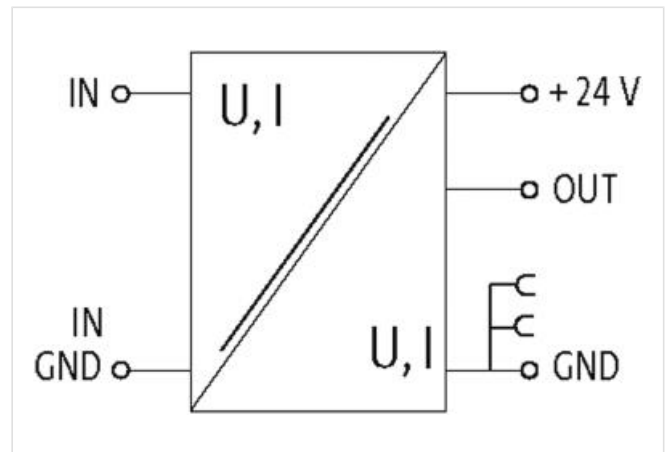
IN: 0..20 mA - OUT: 0..10 V

INPUT: 0...20 mA

OUTPUT: 0...10 V DC, 20 mA

Spring clamp terminals

Input and output galvanically separated

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC $\pm 20\%$ , smoothed
Operating current	50...70 mA
Frequency	max. 500 Hz

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C (storage temperature -40...+80 °C)
Test isolation voltage	1.5 kV
Dimensions H×W×D	91×6.2×70 mm

**Voltage output signals**

Load	max. 25 mA
------	------------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

**Current outputs**

Load	max. 500 $\Omega$
------	-------------------

Product article number of manufacturer	6644212
--	---------